

Underfloor systems

TRENCH

OBO Bettermann Group



Contact our Sales office

0121 544 7011









**For orders:
sales@trenchltd.com**

**For quotations:
quotations@trenchltd.com**

TRENCH

OBO Bettermann Group

Content

	EÜK screed-covered duct system	5
	Screed-covered duct system, EÜK, self-levelling	13
	OKA-T open trunking system, screed-flush	17
	GES service outlets	25
	Cassettes – height-adjustable and decouplable	31
	Heavy-duty systems	41
	UDHOME floor sockets and floor boxes	49
	GES R2 floor sockets	55

EÜK screed-covered duct system



St Steel
FS Strip galvanised

Underfloor installation duct, 3-compartment

Type	Width mm	Length mm	Height mm	Number of compart- ments pc.	Pack m	Weight kg/100 m	Item no.
S3 25028	250	2000	28	3	2	438.000	7400324
S3 35028	350	2000	28	3	2	561.000	7400336


price/m

Underfloor installation duct for laying cables under the floor.



Type	Dimen- sion a mm	Dim. b mm	Dim. h mm	Cross- section draw a mm ²	Cross- section draw b mm ²
S3 25028	90	70	28	2288	1794
S3 35028	120	110	28	3068	2834

Dimensions




St Steel
FS Strip galvanised

Connection shackle, height 28 mm

Type	Dimen- sion a mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
VL 25028E	250	28	1	32.300	7400966
VL 35028E	350	28	1	36.800	7400972

/pc.

Duct connectors for conductive mounting of screed-covered underfloor installation duct.




St Steel
FS Strip galvanised

Duct end closure piece

Type	Dimen- sion a mm	Dim. h mm	Pack Piece	Weight kg/100 pc.	Item no.
SES 25027	250	27	1	8.800	7404002
SES 35027	350	27	1	10.300	7404014

/pc.

End cap for screed-covered and flushfloor underfloor installation ducts.





St Steel
FS Strip galvanised

Vertical bend, three-compartment, height 28 mm

Type	Width mm	Number of compart- ments pc.	Height mm	Pack Piece	Weight kg/100 pc.	Item no.
KV3 25028	250	3	28	1	213.000	7400644
KV3 35028	350	3	28	1	275.000	7400656

/pc.

For vertical direction changes of screed-covered underfloor installation ducts (wall connections, supplies).




Duct connection bracket (conductive)

- St

Steel
- FS

Strip galvanised



Type		Pack	Weight	Item no.
		Piece	kg/100 pc.	
VW E		20	2.800	7400980

/pc.


St Steel
FS Strip galvanised

Underfloor installation duct, 3-compartment

Type	Width mm	Length mm	Height mm	Number of compart- ments pc.	Pack m	Weight kg/100 m	Item no.
S3 25038	250	2000	38	3	2	466.000	7400328
S3 35038	350	2000	38	3	2	595.000	7400340


price/m

Underfloor installation duct for laying cables under the floor.



Type	Dimen- sion a mm	Dim. b mm	Dim. h mm	Cross- section draw a mm ²	Cross- section draw b mm ²
S3 25038	90	70	38	3168	2484
S3 35038	120	110	38	4248	3924

Dimensions




St Steel
FS Strip galvanised

Connection shackle, height 38 mm

Type	Dimen- sion a mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
VL 25038E	250	38	1	33.100	7400968
VL 35038E	350	38	1	40.400	7400974

/pc.

Duct connectors for conductive mounting of screed-covered underfloor installation duct.





St Steel
FS Strip galvanised

Duct end closure piece

Type	Dimen- sion a mm	Dim. h mm	Pack Piece	Weight kg/100 pc.	Item no.
SES 25037	250	37	1	11.700	7400406
SES 35037	350	37	1	14.400	7400418

/pc.

End cap for screed-covered and flushfloor underfloor installation ducts.





St Steel
FS Strip galvanised

Vertical bend, three-compartment, height 38 mm

Type	Width mm	Number of compart- ments pc.	Height mm	Pack Piece	Weight kg/100 pc.	Item no.
KV3 25038	250	3	38	1	223.000	7400648
KV3 35038	350	3	38	1	286.000	7400660

/pc.

For vertical direction changes of screed-covered underfloor installation ducts (wall connections, supplies).




Duct connection bracket (conductive)

- St

Steel
- FS

Strip galvanised




Type		Pack	Weight	Item no.
		Piece	kg/100 pc.	
VW E		20	2.800	7400980

/pc.

St Steel
FS Strip galvanised

UZD250-3 for screed height 70–125 mm

Type	Dim. A mm	Dim. B mm	Dimen- sion a mm	Dim. b mm	Screed height mm	Pack Piece	Weight kg/100 pc.	Item no.
UZD 250-3	367	410	262	283	70 - 125	1	420.000	7410030





Underfloor junction and branch box for screed-covered underfloor installation ducts with sheet steel side walls. To mount installation units in the mounting lid (to be ordered separately). Height can be infinitely adjusted to the nominal screed height (rapid adjustment possible) and the screed can be worked flushed to the screed scraping edge. With noise decoupling option after screed laying and can be used with system accessories, also for heavy-duty application.

Side walls are prepared for duct widths 190 and 250 mm.

St Steel
FS Strip galvanised

Mounting lid 250, nominal size 6

Type	Dim. A mm	Dimen- sion a mm	Dim. b mm	Nominal size	Pack Piece	Weight kg/100 pc.	Item no.
DUG 250-3 6	282	201	253	6	1	89.000	7400463




Mounting lid for underfloor junction and branch box of type UZD250-3 for the installation of a installation unit of nominal size 6. Installation opening 3 mm recessed for later blanking lock with lid blind plate.

St Steel
FS Strip galvanised

Mounting lid 250 for installation units of nominal size 9

Type	Dim. A mm	Dimen- sion a mm	Nominal size	Pack Piece	Weight kg/100 pc.	Item no.
DUG 250-3 9	282	244	9	1	62.000	7400467





Mounting lid for underfloor junction and branch box of type UZD250-3 for the installation of a installation unit of nominal size 9. Installation opening 3 mm recessed for later blanking lock with lid blind plate.

St Steel
FS Strip galvanised

Separating element, intersection, for UZD250-3 and UGD250-3



Type	Pack Piece	Weight kg/100 pc.	Item no.
UZD CC2 250250	1	73.000	7428134



Separating element, three-compartment, for intersections in a UZD250-3 or UGD250-3 underfloor box, for branching-off trunking with a width of 250 mm.

UZD350-3 for screed height 70–125 mm

St Steel
FS Strip galvanised



Type	Dim. A mm	Dim. B mm	Dimen- sion a mm	Dim. b mm	Screed height mm	Pack Piece	Weight kg/100 pc.	Item no.
UZD 350-3	467	510	362	383	70-125	1	590.000	7410034


/pc.

Underfloor junction and branch box for screed-covered underfloor installation ducts with sheet steel side walls. To mount installation units in the mounting lid (to be ordered separately). Height can be infinitely adjusted to the nominal screed height (rapid adjustment possible) and the screed can be worked flushed to the screed scraping edge. With noise decoupling option after screed laying and can be used with system accessories, also for heavy-duty application.

Side walls prepared for duct widths of 190, 250 and 350 mm.

Mounting lid 350, nominal size 6

St Steel
FS Strip galvanised




Type	Dim. A mm	Dimen- sion a mm	Dim. b mm	Pack Piece	Weight kg/100 pc.	Item no.
DUG 350-3 6	383	201	253	1	290.000	7400509

/pc.

Mounting lid for underfloor junction and branch box of type UZD350-3 for the installation of a installation unit of nominal size 6. Installation opening 3 mm recessed for later blanking lock with lid blanking plate.

Mounting lid 350, nominal size 9

St Steel
FS Strip galvanised




Type	Dim. A mm	Dimen- sion a mm	Pack Piece	Weight kg/100 pc.	Item no.
DUG 350-3 9	383	244	1	267.000	7400513

/pc.

Mounting lid for underfloor junction and branch box of type UZD350-3 for the installation of a installation unit of nominal size 9. Installation opening 3 mm recessed for later blanking lock with lid blanking plate.

Mounting lid 350, nominal size R9

St Steel
FS Strip galvanised



Type	Dim. A mm	Dimen- sion d Ø mm	Pack Piece	Weight kg/100 pc.	Item no.
DUG 350-3 R9	383	305	1	230.000	7400549

/pc.

Mounting lid for underfloor junction and branch boxes of type UZD350-3 for the installation of an installation unit of nominal size R9. Installation opening 3 mm recessed as a later blanking lock with lid blanking plate.



St Steel
FS Strip galvanised

Separating element, intersection, for UZD350-3 and UGD350-3

Type	Pack Piece	Weight kg/100 pc.	Item no.
UZD CC3 350350	1	115.000	7428136

/pc.

Separating element, three-compartment, for intersections in a UZD350-3 or UGD350-3 underfloor box, for branching-off ducts with a width of 350 mm.




Quick height-adjustment aid

Type	Pack Piece	Weight kg/100 pc.	Item no.
SE UZD3	4	1.700	7410160

/pc.

Quick release aid for underfloor boxes UZD-3 and UGD-3




St Steel
G Electrogalvanised

Protective conductor connection bracket

Type	Pack Piece	Weight kg/100 pc.	Item no.
8AWR	10	0.610	6288704

/pc.

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.
Clamping area: 2 x 1.5–4 mm²
If there is a fault, metallic parts will carry voltage. Tighten the contact screw with at least 1.2 Nm or ensure the contact with mechanical work.



Screed-covered duct system, EÜK, self-levelling




PVC Polyvinylchloride

EÜK PVC underfloor installation duct, duct height 25 mm

Type	Width mm	Trun- king height mm	Length mm	Number of compart- ments pc.	Cross- section draw a mm²	Pack m	Weight kg/100 m	Item no.
DU 6025	60	25	3000	1	1030	3	43.000	7425900

price/m

Trapezoidal duct, one-compartment, for use in cement screeds and under false floors.
An important precondition for correct underfloor installation is the screed structure. In the case of a screed-covered system, it is important that the screed thickness above the duct has a sufficiently high load capacity.





PVC Polyvinylchloride

EÜK duct connector

Type	Width mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
DUC 6025	60	25	50	1.698	7425910

/pc.

Coupling element for connecting one-compartment PVC duct lengths with a trapezoid-shaped cross-section.



St Steel

FS Strip galvanised

EÜK fastening clamp

Type	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
DC6025	25	10	10.000	7428342

/pc.

Fixing strap for three neighbouring 1-compartment PVC duct lengths of width 60 mm.



PVC Polyvinylchloride




EÜK vertical bend

Type	Width mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
KV DU 6025 90	60	25	1	13.000	7425935

/pc.

Vertical bend, 90°, suitable for duct size 60x25.





PVC Polyvinylchloride

EÜK horizontal bend

Type	Width mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
KH DU 6025 90	60	25	1	10.400	7425920



/pc.

Horizontal bend, 90°, suitable for duct size 60x25.



EÜK PVC underfloor installation duct, duct height 35 mm

PVC Polyvinylchloride



Type	Width mm	Trun- king height mm	Length mm	Number of compart- ments pc.	Cross- section draw a mm²	Pack m	Weight kg/100 m	Item no.
DU 9035	90	35	3000	1	2305	3	58.000	7425902



price/m

Trapezoidal duct, one-compartment, for use in cement screeds and under false floors.

An important precondition for correct underfloor installation is the screed structure. In the case of a screed-covered system, it is important that the screed thickness above the duct has a sufficiently high load capacity.

Duct connector

PVC Polyvinylchloride




Type	Width mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
DUC 9035	90	35	50	3.525	7425912

/pc.

Coupling element for connecting one-compartment PVC duct lengths with a trapezoid-shaped cross-section.

Fastening clamp for 3x PVC system, trunking height 35 mm

St Steel
FS Strip galvanised




Type	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
DC9035	35	10	10.000	7428340

/pc.

Fixing strap for three neighbouring 1-compartment PVC duct lengths of width 90 mm.

EÜK vertical bend

PVC Polyvinylchloride




Type	Width mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
KV DU 9035 90	90	35	1	19.200	7425940

/pc.

Vertical bend, 90°, suitable for duct size 90x35.

EÜK horizontal bend

PVC Polyvinylchloride



Type	Width mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
KH DU 9035 90	90	35	1	15.500	7425925

/pc.

Horizontal bend, 90°, suitable for duct size 90x35.


St Steel
FS Strip galvanised

Underfloor box UDS6 for PVC duct

Type	Screed height mm	Nominal size	Pack Piece	Weight kg/100 pc.	Item no.
UDSPD 9035 6	65-90	6	1	231.000	7400350

/pc.

Underfloor outlet box with fixed, unchangeable 202 x 254 mm installation opening for an installation unit of nominal size 6. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box possesses installation openings for three single-compartment PVC ducts of nominal size 60 x 25 and 90 x 35 on all four sides. The box is principally suited for use in floor structures in cement screed with a structure height of up to 90 mm.





St Steel
FS Strip galvanised

Underfloor box UDS9 for PVC duct

Type	Screed height mm	Nominal size	Pack Piece	Weight kg/100 pc.	Item no.
UDSPD 9035 9	65-100	9	1	225.000	7400352

/pc.

Underfloor outlet box with fixed, unchangeable 244 x 244 mm installation opening for an installation unit of nominal size 9. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box possesses installation openings for three single-compartment PVC ducts of nominal size 60 x 25 and 90 x 35 on all four sides. The box is principally suited for use in floor structures in cement screed with a structure height of up to 100 mm.



Accessories for underfloor connection sockets, self-levelling


St Steel
G Electrogalvanised

Protective conductor connection bracket

Type	Pack Piece	Weight kg/100 pc.	Item no.
8AWR	10	0.610	6288704

/pc.

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.
Clamping area: 2 x 1.5–4 mm²
If there is a fault, metallic parts will carry voltage. Tighten the contact screw with at least 1.2 Nm or ensure the contact with mechanical work.



OKA-T open trunking system, screed-flush



UFS Portfolio UK / en / 2021/03/24 07:59:00 07:59:18 (LLExport_02826) / 2021/03/24 07:59:18 07:59:18

OKA-T underfloor installation trunking, open, three-compartment, width 300 mm



St Steel
FS Strip galvanised

Trunking unit, blank, height 65 mm

Type	Length mm	Width mm	Height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA-T 30065	2400	300	65	1	2,989.200	7402223

/pc.

3 compartment flush floor trunking with 3 blind lids. Trunking unit consists of trunking connectors, fixing brackets and separating retainers.



St Steel
FS Strip galvanised

Trunking unit for GES9, height 65 mm

Type	Length mm	Width mm	Height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA-T 30065 D9	2400	300	65	1	2,531.500	7402224

/pc.

3 compartment flush floor trunking with 3 mounting lids for GES9. Trunking unit consists of trunking connectors, fixing brackets and separating retainers.



St Steel
FS Strip galvanised

OKA-T trunking cover, blank

Type	Dim. A mm	Width mm	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
OKAT D 300	303	300	800	1	570.000	7402535

/pc.

Trunking cover for flushfloor OKA-T trunking system, blind version.




St Steel
FS Strip galvanised

OKA-T trunking cover with GES9 mounting opening

Type	Dim. A mm	Dimen- sion a mm	Width mm	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
OKAT DG 9 300	303	244	300	800	1	430.000	7402549

/pc.

Trunking cover for flushfloor OKA-T trunking system with installation opening for installation units of nominal size 9.




St Steel
FS Strip galvanised

OKA-T 90° branch for trunking width 300 mm

Type	Dim. b mm	Dim. h mm	Width mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA B30065	303	65	300	65	1	34.800	7402304

/pc.



90° branch for a flushfloor OKA-T trunking system, consisting of an end cap and connection brackets.



OKA-T underfloor installation trunking, open, three-compartment, width 300 mm

OKA-T vertical bend

St Steel
FS Strip galvanised




Type	Width mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA RB3 30065	300	65	1	501.000	7402420

/pc.

For vertical direction change of 3-compartment flushfloor OKA-T trunking system (wall connections, supplies).

OKA-T trunking end piece

St Steel
FS Strip galvanised




Type	Dim. h mm	Width mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA E30065	64	300	65	1	20.500	7402364

/pc.

End cap for flushfloor OKA-T trunking system, consisting of an L-shaped bracket.

OKA-T separating element, T branch for trunking widths 300 mm with 300 mm

St Steel
FS Strip galvanised




Type	Dim. h mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA C3 30030065	61	65	1	59.500	7404258

/pc.

Separating element for a three-compartment T branch in an OKA-T flushfloor trunking system for branching trunking of width 300 mm.

OKA-T separating element, intersection for trunking width 300 mm with 300 mm

St Steel
FS Strip galvanised



Type	Dim. h mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA CC3 30030065	61	65	1	112.500	7404340

/pc.

Separating element for a three-compartment cross branch of OKA-T flushfloor trunking systems of width 300 mm.

OKA-T underfloor installation trunking, open, three-compartment, width 400 mm



St Steel
FS Strip galvanised

Trunking unit, blank, height 65 mm

Type	Length mm	Width mm	Height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA-T 40065	2400	400	65	1	3,744.700	7402225

/pc.

3 compartment flush floor trunking with 3 blind lids. Trunking unit consists of trunking connectors, fixing brackets and separating retainers.





St Steel
FS Strip galvanised

Trunking unit for GES9, height 65 mm

Type	Length mm	Width mm	Height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA-T 40065 D9	2400	400	65	1	3,287.000	7402226

/pc.

3 compartment flush floor trunking with 3 mounting lids for GES9. Trunking unit consists of trunking connectors, fixing brackets and separating retainers.



St Steel
FS Strip galvanised

OKA-T trunking cover, blank

Type	Dim. A mm	Width mm	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
OKAT D 400	403	400	800	1	760.000	7402539

/pc.

Trunking cover for flushfloor OKA-T trunking system, blind version.




St Steel
FS Strip galvanised

OKA-T trunking cover with GES9 mounting opening

Type	Dim. A mm	Dimen- sion a mm	Width mm	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
OKAT DG 9 400	403	244	400	800	1	620.000	7402553

/pc.

Trunking cover for flushfloor OKA-T trunking system with installation opening for installation units of nominal size 9.




St Steel
FS Strip galvanised

OKA-T 90° branch for trunking width 400 mm

Type	Dim. b mm	Dim. h mm	Width mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA B40065	403	65	400	65	1	42.700	7402320

/pc.



90° branch for a flushfloor OKA-T trunking system, consisting of an end cap and connection brackets.



OKA-T underfloor installation trunking, open, three-compartment, width 400 mm

OKA-T vertical bend

St Steel
FS Strip galvanised




Type	Width mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA RB3 40065	400	65	1	639.000	7402436

/pc.

For vertical direction change of 3-compartment flushfloor OKA-T trunking system (wall connections, supplies).

OKA-T trunking end piece

St Steel
FS Strip galvanised




Type	Width mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA E40065	400	65	1	27.300	7402380

/pc.

End cap for flushfloor OKA-T trunking system, consisting of an L-shaped bracket.

OKA-T separating element, intersection for trunking width 400 mm with 400 mm

St Steel
FS Strip galvanised




Type	Dim. h mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA CC3 40040065	61	65	1	195.000	7402350

/pc.

Separating element for a three-compartment cross branch of flushfloor OKA/T trunking systems of width 400 mm.

OKA-T separating element, intersection for trunking width 400 mm with 300 mm

St Steel
FS Strip galvanised




Type	Dim. h mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA CC3 40030065	61	65	1	153.000	7402334

/pc.

Separating element for a three-compartment cross branch of flushfloor OKA/T trunking systems of width 300 mm.

OKA-T separating element, T branch for trunking width 400 mm with 400 mm

St Steel
FS Strip galvanised



Type	Dim. h mm	Trun- king height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA C3 40040065	61	65	1	86.300	7404296

/pc.


Separating element for a three-compartment T branch in an OKA-T flushfloor trunking system for branching trunking of width 400 mm.

OKA-T underfloor installation trunking, open, three-compartment, width 400 mm

St Steel
FS Strip galvanised

OKA-T separating element, T branch for trunking width 400 mm with 300 mm

Type	Dim. h mm	Trunking height mm	Pack Piece	Weight kg/100 pc.	Item no.
OKA C3 40030065	61	65	1	73.000	7404282




/pc.

Separating element for a three-compartment T branch in an OKA-T flushfloor trunking system for branching trunking of width 300 mm.

St Steel
FS Strip galvanised

Mounting protection lid OKAT DG 9

Type	Pack Piece	Weight kg/100 pc.	Item no.
OKAT DG 9	1	64.200	7402587





/pc.

Protective mounting lid für flushfloor OKA-T trunking system with installation opening for installation unit.

PA Polyamide

GES9/10 service outlet for OKA-T, 3-compartment

Type	Colour	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
GES9 100K U 7011	Iron grey	10	1	211.000	7402290




/pc.

Service outlet with handle clamp for mounting in a OKA-T trunking system. With mounting support for receiving up to three APMT5 cover plates.

St Steel
G Electrogalvanised

Protective conductor connection bracket

Type	Pack Piece	Weight kg/100 pc.	Item no.
8AWR	10	0.610	6288704



/pc.

Protective conductor connection bracket to include steel and aluminium device installation trunking, service poles and system components of underfloor trunking systems in the protective measure.


Clamping area: 2 x 1.5–4 mm²

If there is a fault, metallic parts will carry voltage. Tighten the contact screw with at least 1.2 Nm or ensure the contact with mechanical work.

Cover plate APMT5/0

St Steel

Strip galvanised/organically coated



Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 0	Grey-white	181.5	20	12.700	7406904


/pc.

For blanking locking on an unused compartment in an MT mounting support.
L = 181.5 mm.

Cover plate APMT5/1

St Steel

Strip galvanised/organically coated



Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 1	Grey-white	181.5	20	12.700	7406908


/pc.

Cover plate for the installation of 4 data connection sockets of design LJU6C.
L = 181.5 mm.

Cover plate APMT5 with two single sockets

St Steel

Strip galvanised/organically coated



Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 BS 2xSS0	Grey-white	181.5	4	25.300	7407878


/pc.

Cover plate with two switched single sockets for installation in mounting supports beneath GES service outlets and cassettes. Sockets with increased contact protection with screw connection, 3-pole, 13 A, 250 V~, corresponds to BS 1363.

Cover plate APMT5 with double socket

St Steel


Strip galvanised/organically coated



Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 BS 2SS0	Grey-white	181.5	4	23.200	7407870

/pc.

Cover plate with a switched double socket for installation in mounting supports beneath GES service outlets and cassettes. Socket with increased contact protection with screw connection, 3-pole, 13 A, 250 V~, corresponds to BS 1363.

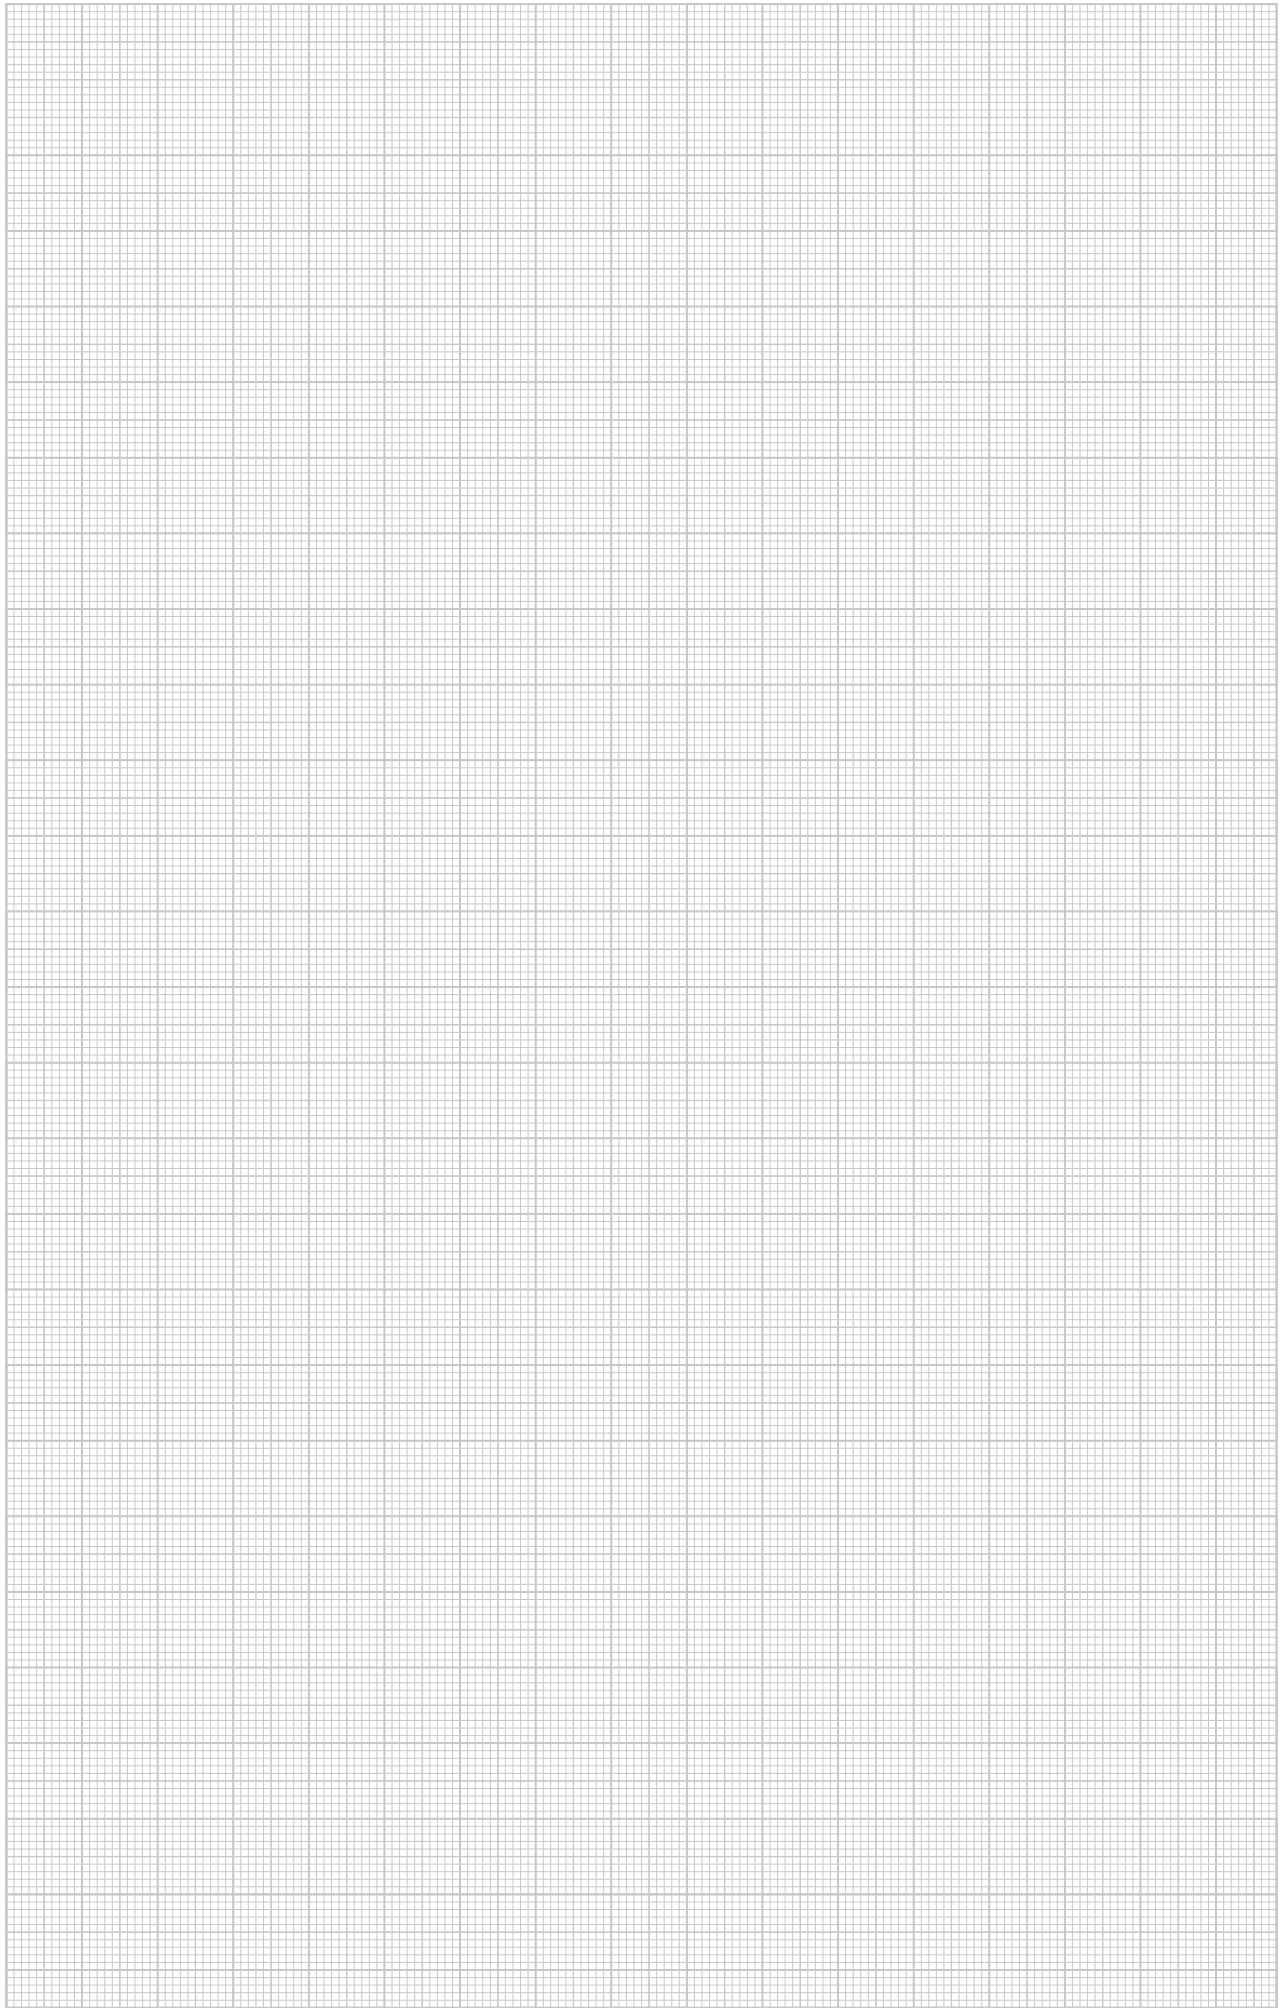

GES service outlets




PA Polyamide

GES6 service outlet with handle clamp

Type	Colour	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
GES6 U 7011	Iron grey	5	1	157.500	7405308
GES6 U 9011	Graphite black	5	1	150.000	7405312

/pc.

Service outlet with handle clamp, 3-compartment, for the installation of MT6 mounting support. Three type APMT2 cover plates can be installed.




PA Polyamide

GES9-3B service outlet with handle clamp

Type	Colour	Pack Piece	Weight kg/100 pc.	Item no.
GES9-3B U 7011	Iron grey	1	205.000	7405077
GES9-3B U 9011	Graphite black	1	205.000	7405079

/pc.

Service outlet with handle clamp, 3-compartment, for the installation of MT9 mounting support. Three type APMT5 cover plates can be installed. Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 10 mm.




PA Polyamide

Underfloor box with GES9

Type	Height adjustment range mm	Colour	Pack Piece	Weight kg/100 pc.	Item no.
SFB GES9 7011 BS	65-90	Iron grey	1	290.000	7427475

/pc.

Square screed socket with GES9 UGE service outlet for use in screed floors for indoor use. With pre-marked insertion openings for pipelines (M20/M25) on all four sides. In the as-delivered state, the installation housing is closed with a mounting protection lid. The minimum installation depth is 65 mm, the height-adjustment range +25 mm. Three type APMT5 cover plates can be installed.



PA Polyamide

GESR9 service outlet with handle clamp


Type	Colour	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
GESR9 U 7011	Iron grey	5	1	232.000	7405528
GESR9 U 9011	Graphite black	5	1	232.000	7405532

/pc.

Service outlet with handle clamp for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in duct systems and system floors for indoor use.

Also to be used in conjunction with the MT mounting support. The number of installable accessories depends on the type of accessories.

Up to 9 installation devices with 50 mm central plate can be inserted.



St Steel



FS Strip galvanised

Mounting support for GES9

Type	Pack Piece	Weight kg/100 pc.	Item no.
MT 9 DB AP 5	1	72.800	7428235

/pc.

Closed mounting support box for installation of 3 cover plates APMT5. The mounting support will be fixed under the service outlet GES9DB. With 6 knock-out openings M20 and M25 for installation of flexible conduits.



Fastening bracket for raised floor mounting

Alu Aluminium




Type	Pack PU	Weight kg/100 PUs	Item no.
GES4 BG DB	1	8.000	7407552

price/pack

Four fastening brackets for rectangular GES service outlets in raised floors of underfloor boxes of type UDS. Clamping range up to 65 mm.

Mounting support, nominal size 6, for APMT2 cover plates

St Steel
FS Strip galvanised




Type	Pack Piece	Weight kg/100 pc.	Item no.
MT 6 AP2	1	20.000	7407752

/pc.

Mounting support for accepting three APMT2 cover plates, which aid the installation of accessories in installation units of nominal size 6.

Cover plate APMT2/0

St Steel
Strip galvanised/organically coated




Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT2 0	Grey-white	163	20	12.300	7406912

/pc.

For blanking locking on an unused compartment in an MT mounting support.
L = 163 mm.

Cover plate APMT2/1

St Steel
Strip galvanised/organically coated




Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT2 1	Grey-white	163	20	11.100	7406916

/pc.

Cover plate for the installation of 4 data connection sockets of design LJU6C.
L = 163 mm.

Cover plate APMT2 with double socket

St Steel
Strip galvanised/organically coated



Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT2 BS 2SS0	Grey-white	163	4	21.500	7407872

/pc.

Cover plate with a switched double socket for installation in mounting supports beneath GES service outlets and cassettes.
Socket with increased contact protection with screw connection, 3-pole, 13 A, 250 V~, corresponds to BS 1363.


St Steel
FS Strip galvanised

Mounting support, nominal size 9 and R9, for APMT5 cover plates

Type	Pack Piece	Weight kg/100 pc.	Item no.
MT 9R9 AP 5	1	25.650	7407756

/pc.

Mounting support for accepting three APMT5 cover plates, which aid the installation of accessories in installation units of nominal size 9.




St Steel
Strip galvanised/organically coated

Cover plate APMT5/0

Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 0	Grey+white	181.5	20	12.700	7406904

/pc.

For blanking locking on an unused compartment in an MT mounting support.
L = 181.5 mm.




St Steel
Strip galvanised/organically coated

Cover plate APMT5/1

Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 1	Grey+white	181.5	20	12.700	7406908

/pc.

Cover plate for the installation of 4 data connection sockets of design LJU6C.
L = 181.5 mm.




St Steel
Strip galvanised/organically coated

Cover plate APMT5 with two single sockets

Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 BS 2xSS0	Grey+white	181.5	4	25.300	7407878

/pc.

Cover plate with two switched single sockets for installation in mounting supports beneath GES service outlets and cassettes. Sockets with increased contact protection with screw connection, 3-pole, 13 A, 250 V~, corresponds to BS 1363.




St Steel
Strip galvanised/organically coated

Cover plate APMT5 with double socket

Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 BS 2SS0	Grey+white	181.5	4	23.200	7407870

/pc.

Cover plate with a switched double socket for installation in mounting supports beneath GES service outlets and cassettes. Socket with increased contact protection with screw connection, 3-pole, 13 A, 250 V~, corresponds to BS 1363.






Type	Colour	Pack Piece	Weight kg/100 pc.	Item no.
SA GES9-3B 9011	Graphite black	1	2.700	7407942

/pc.

Cord outlets (as spare part) for installation in GES9-3 service outlets with handle clamp.

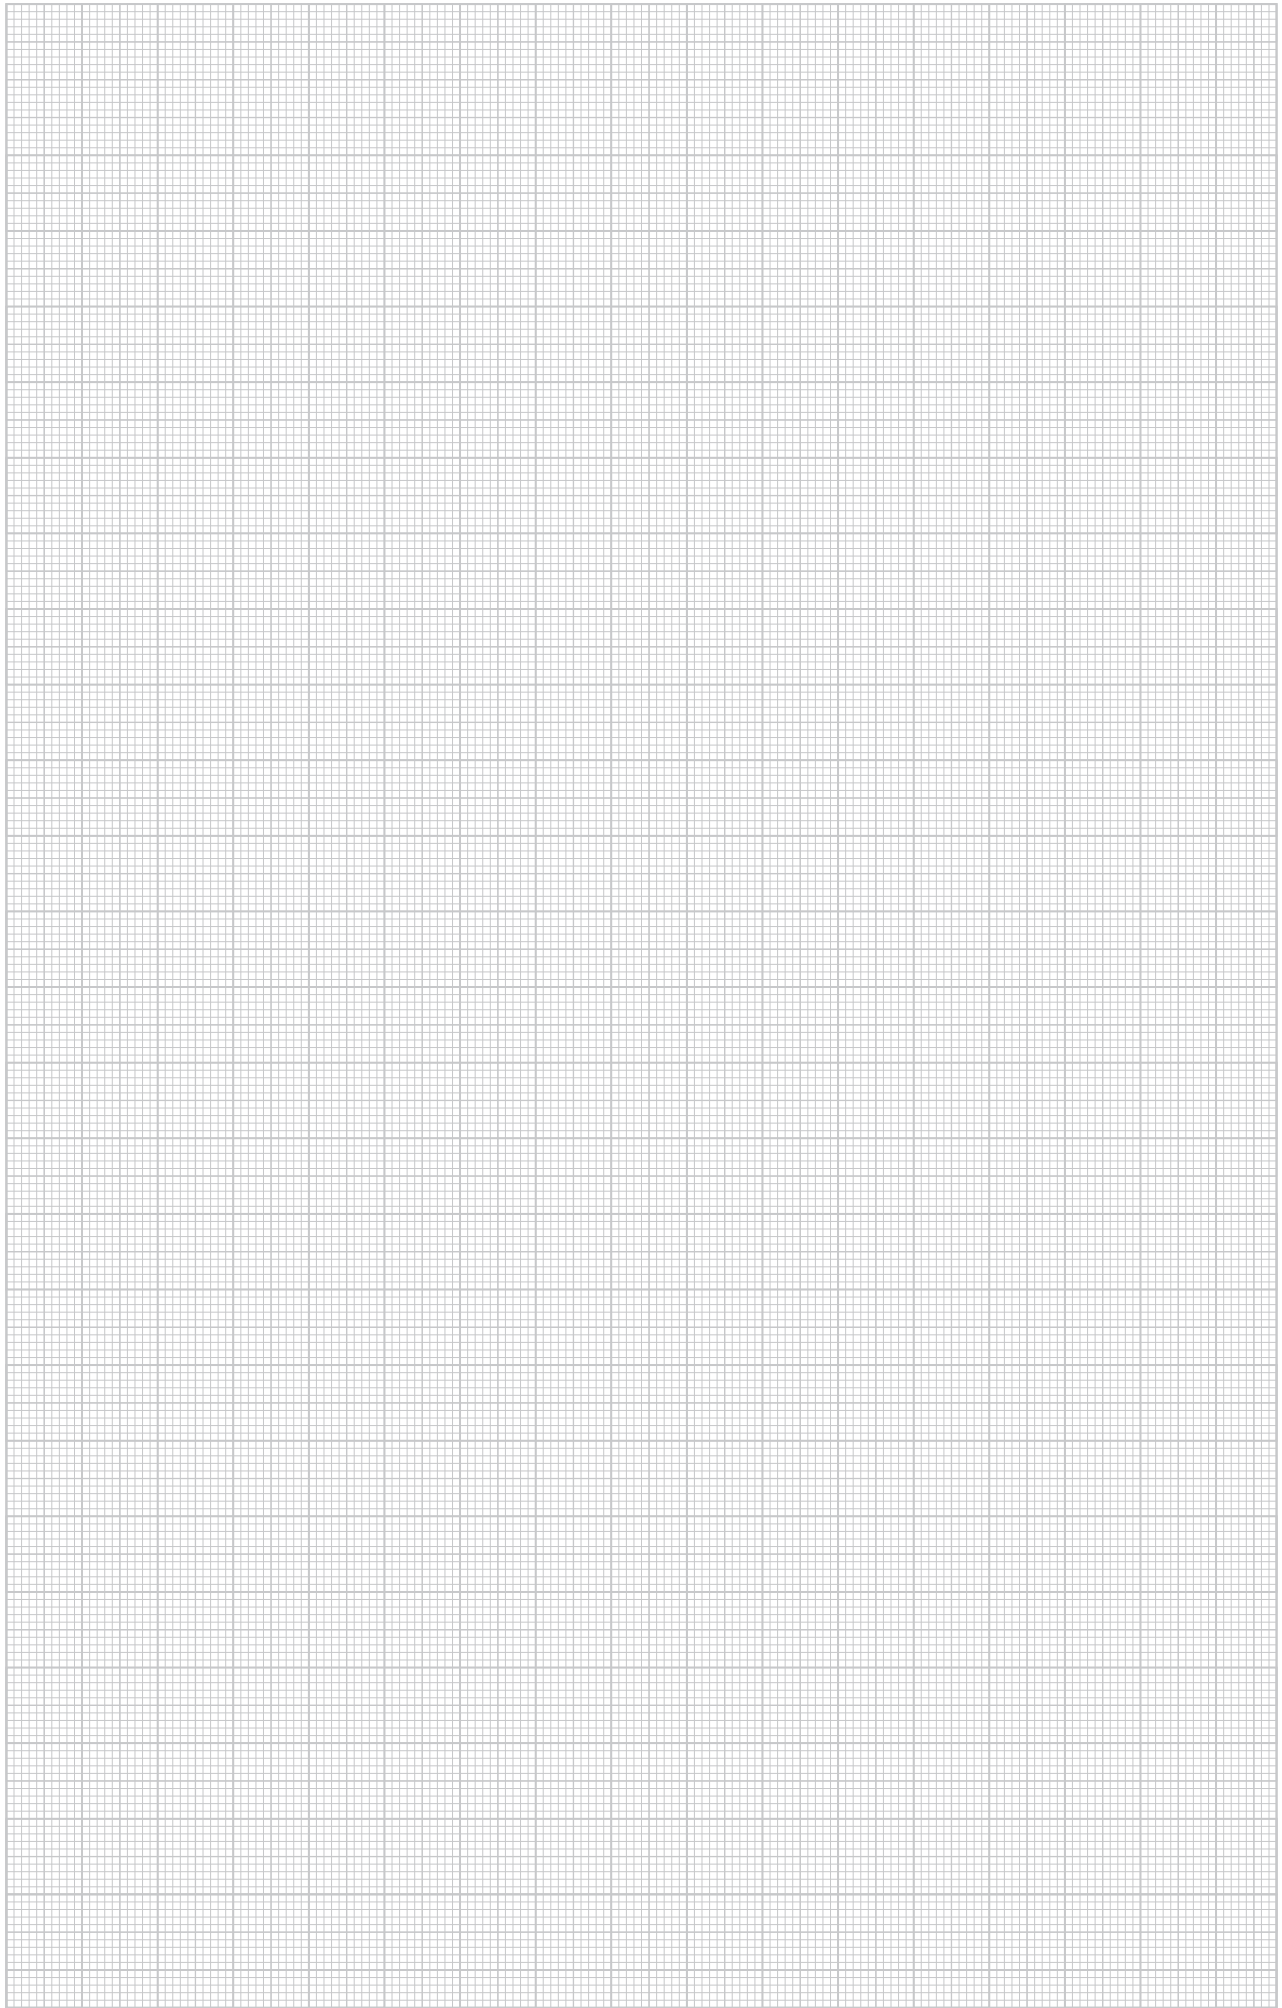

Cassettes – height-adjustable and decouplable



CuZn 37 Brass



Height-adjustable cassette for inspection opening, RKN, brass

Type	Nominal size	Dim. h mm	Floor covering thickness mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
RKN2 9 MS 20	9	100	20	100-150	1	589.000	7409022

/pc.

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size 9 in dry or wet-cleaned floors for indoor use. Only suitable for smooth floor coverings.

Height-adjustable cassette as a blind cassette, two-compartment 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.



VA Stainless steel, rustproof 1.4301



Height-adjustable cassette for inspection opening, RKN, stainless steel

Type	Nominal size	Dim. h mm	Floor covering thickness mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
RKN2 9 VS 20	9	100	20	100-150	1	440.000	7409044

/pc.

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size 9 in dry or wet-cleaned floors for indoor use. Only suitable for smooth floor coverings.

Height-adjustable cassette as a blind cassette, two-compartment 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.





CuZn 37 Brass

Height-adjustable cassette with cord outlet, RKS, brass

Type	Nominal size	Dim. h mm	Floor covering thickness mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
RKS2 9 MS 20	9	105	20	105-150	1	432.000	7409212

/pc.

Height-adjustable cassette of nominal size 9 with cord outlet, for the installation of accessories in dry-cleaned floors indoors.





VA Stainless steel, rustproof 1.4301

Height-adjustable cassette with cord outlet, RKS, stainless steel

Type	Nominal size	Dim. h mm	Floor covering thickness mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
RKS2 9 VS 20	9	105	20	105-150	1	430.000	7409218



/pc.

Height-adjustable cassette for cord outlet, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 6 Modul 45 devices.



Height-adjustable cassette for tube body, RKFN, stainless steel

VA Stainless steel, rustproof 1.4301





Type	Nominal size	Dim. h mm	Floor covering thickness mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
RKFN2 9 VS 20	9	105	20	105-150	1	407.100	7409368

/pc.

Height-adjustable cassette for tube body, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.

Height-adjustable, decouplable cassette for inspection opening, RKNUZD3, stainless steel

VA Stainless steel, rustproof 1.4301



Type	Nominal size	Dim. h mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
RKN2 UZD3 9VS20	9	90	20	1	351.000	7409066

/pc.



Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size 9 in dry or wet-cleaned floors for indoor use, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG../9 or in UGD250-3/9 or UGD350-3/9. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.

Height-adjustable cassette as a blind cassette, 3-compartment 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.

Height-adjustable, decouplable cassette with cord outlet, RKSNUZD3, stainless steel

VA Stainless steel, rustproof 1.4301

CuZn 87 Brass



Type	Nominal size	Dim. h mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
RKS2 UZD3 9VS20	9	90	20	1	338.000	7409238
RKS2 UZD3 9MS20	9	90	20	1	348.000	7409232



/pc.

Height-adjustable cassette, decoupled from the floor, of nominal size 9, with cord outlet, for the installation of accessories in dry-cleaned floors indoors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a mounting cover DUG../9 or in UGD250-3/9 or UGD350-3/9. Mounting takes place using height-adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.

Height-adjustable cassette for cord outlet, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.

Height-adjustable, decouplable cassette for tube body, RKFNUZD3, stainless steel

VA Stainless steel, rustproof 1.4301



Type	Nominal size	Dim. h mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
RKF2 UZD3 9VS20	9	90	20	1	346.000	7409378

/pc.

Height-adjustable cassette, decoupled from the floor, of nominal size 9, for tube bodies, for the installation of accessories in dry or wet-cleaned floors for indoor use, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a mounting lid DUG../9 or in UGD250-3/9 or UGD350-3/9. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.

Height-adjustable cassette for tube body, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.



St Steel
FS Strip galvanised

Height adjustment bracket for installation in UGD250-3 for one square cassette

Type	Material	Pack Piece	Weight kg/100 pc.	Item no.
NW 250-3 QK	St	1	74.000	7410540
NW 350-3 QK	St	1	94.000	7410544

/pc.

Height adjustment bracket to mount the square height-adjustable cassettes in the underfloor connection socket, type UZD250-3 or UZD350-3.
With all the components necessary for mounting and height adjustment.




St Steel
F Hot galvanised

Mounting lid for height-adjustable cassette of nominal size 9 in system bases

Type	Width mm	Length mm	Cut-out dimensions mm	Pack Piece	Weight kg/100 pc.	Item no.
DUG RK UAN 9	325	325	248x248	1	108.000	7428547



/pc.

Mounting lid for the installation of height-adjustable cassettes of nominal size 9 in system floors.



Height-adjustable cassette for inspection opening, RKR, stainless steel

VA Stainless steel, rustproof 1.4301





Type	Nominal size	Dim. h mm	Floor covering thickness mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
RKR2 9V 20	R9	105	20	105-155	1	453.000	7409128

/pc.

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size R9 in dry or wet-cleaned floors for indoor use. Only suitable for smooth floor coverings.
Height-adjustable cassette as a blind cassette, 3-compartment 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.

Height-adjustable cassette with cord outlet, RKSR, brass

CuZn 37 Brass




Type	Nominal size	Dim. h mm	Floor covering thickness mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
RKS2 R9 M20	R9	110	20	110-155	1	430.000	7409272

/pc.

Height-adjustable cassette for cord outlet, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.

Height-adjustable cassette with cord outlet, RKSR, stainless steel

VA Stainless steel, rustproof 1.4301




Type	Nominal size	Dim. h mm	Floor covering thickness mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
RKS2 R9 V20	R9	110	20	110-155	1	420.000	7409278

/pc.

Height-adjustable cassette for cord outlet, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.

Height-adjustable cassette for tube body, RKFR, stainless steel

VA Stainless steel, rustproof 1.4301



Type	Nominal size	Dim. h mm	Floor covering thickness mm	Floor height mm	Pack Piece	Weight kg/100 pc.	Item no.
RKFR2 9 V20	R9	110	20	110-155	1	380.000	7409430

/pc.

Height-adjustable cassette for tube body, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.

VA Stainless steel, rustproof 1.4301


Height-adjustable, decouplable cassette for inspection opening, RKRNUZD3, stainless steel

Type	Nominal size	Dim. h mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
RKRNUZD3R9VS20	R9	94	20	1	358.000	7409158

/pc.

Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size R9 in dry or wet-cleaned floors for indoor use, for mounting in underfloor boxes UZD350-3, either in conjunction with a blanking lid DUG350-3R9 or in UGD250-3R9. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.

Height-adjustable cassette as a blind cassette, 3-compartment 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.



VA Stainless steel, rustproof 1.4301

CuZn 37 Brass


Height-adjustable, decouplable cassette with cord outlet, RKSRNUZD3, stainless steel

Type	Nominal size	Dim. h mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
RKSRNUZD3R9VS20	R9	94	20	1	368.000	7409308
RKSRNUZD3R9MS20	R9	94	20	1	372.000	7409302

/pc.

Height-adjustable cassette, decoupled from the floor, of nominal sized R9, with cord outlet, for the installation of accessories in dry-cleaned floors for indoor use, for mounting in underfloor boxes UZD350-3, either in conjunction with a mounting lid DUG350-3R9 or UGD350-3R9. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.

Height-adjustable cassette for cord outlet, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.



VA Stainless steel, rustproof 1.4301


Height-adjustable, decouplable cassette for tube body, RKFRNUZD3, stainless steel

Type	Nominal size	Dim. h mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
RKFRNUZD3R9VS20	R9	94	20	1	336.000	7409450

/pc.

Height-adjustable cassette, decoupled from the floor, of nominal size R9, for tube bodies, for the installation of accessories in dry or wet-cleaned floors for indoor use, for mounting in underfloor boxes UZD350-3, either in conjunction with a mounting lid DUG350-3R9 or UGD350-3R9. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.

Height-adjustable cassette for tube body, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.



St Steel


FS Strip galvanised

Height adjustment bracket for installation in UGD350-3 for one round cassette

Type	Material	Pack Piece	Weight kg/100 pc.	Item no.
NW 350-3 RK	St	1	173.000	7410556


/pc.

Height adjustment bracket to mount the round height-adjustable cassettes in the underfloor box, type UGD350-3. With all the components necessary for mounting and height adjustment.



Tube body with cover plate, with handle clamp, for frame cassette and height-adjustable cassette

Zn Die-cast zinc
N Nickel-plated




Type	Pack Piece	Weight kg/100 pc.	Item no.
TUK2 GV	1	59.000	7428140

/pc.

Height-adjustable cord outlet for installation in RKF frame cassettes and in height-adjustable round and square RKFR and RKFN cassettes. Raised height when used, flushfloor when unused. Use in wet-care floors. Tube body cover and handle made of V2A.

Tube body with cover plate, without handle clamp, for frame cassette and height-adjustable cassette

Zn Die-cast zinc
N Nickel-plated



Type	Pack Piece	Weight kg/100 pc.	Item no.
TUK2 V	1	59.000	7428141

/pc.

Height-adjustable cord outlet for installation in RKF frame cassettes and in height-adjustable round and square RKFR and RKFN cassettes. Raised height when used, flushfloor when unused. Use in wet-care floors. Tube body cover made of V2A.

Cord outlet for cassette

VA Stainless steel, rustproof 1.4301
Brushed and laminated





Type	Pack Piece	Weight kg/100 pc.	Item no.
SA RKS2 V	1	12.800	7409355
SA RKS2 9 V	1	13.800	7409358

/pc.

Cord outlet for installation in height-adjustable cassettes. Use only in dry-cleaned floors.

Fitter for height-adjustable cassette

St Steel
FS Strip galvanised





Type	Nominal size	Pack Piece	Weight kg/100 pc.	Item no.
AS 9	9	1	7.970	7406952

/pc.

Lid put up for holding up the square, height-adjustable cassette, with cord outlet.

Round seal for height-adjustable round cassette (spare part)

EPDM Ethylene propylene dien rubber DIN 1629



Type	Pack Piece	Weight kg/100 pc.	Item no.
RD R9 NK2	1	1.500	7407075


/pc.

Round seal for height-adjustable round cassettes RKFR2 and RKFR2 of nominal sizes R4, R7 and R9.

EPDM Ethylene propylene dien rubber DIN 1629

Round seal for tube body


Type	Pack Piece	Weight kg/100 pc.	Item no.
RD2 TUK2	1	0.200	7407098
/pc.			
Round seal for tube body TUK2 - spare part.			



EPDM Ethylene propylene dien rubber DIN 1629

Flat seal for square height-adjustable cassette, nominal size (spare part)

Type	Pack Piece	Weight kg/100 pc.	Item no.
FD 9 QNK2	1	1.700	7407109
/pc.			
Flat seal for height-adjustable square cassettes RKN2 and RKFN2 of nominal sizes 4 and 9.			



Mounting paste based on synthetic oil


Care agent for cassette seal and tube body seal

Type	Pack Piece	Weight kg/100 pc.	Item no.
PF-G	1	0.800	7407110
/pc.			
Cleaning agent for round seals RD2, flat seals FD2 QNK and tube body seal RD2TUK2.			



Mounting support, nominal size 9 and R9, for APMT5 cover plates

St Steel
FS Strip galvanised




Type	Pack Piece	Weight kg/100 pc.	Item no.
MT 9R9 AP 5	1	25.650	7407756

/pc.

Mounting support for accepting three APMT5 cover plates, which aid the installation of accessories in installation units of nominal size 9.

Cover plate APMT5/0

St Steel
Strip galvanised/organically coated




Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 0	Grey-white	181.5	20	12.700	7406904

/pc.

For blanking locking on an unused compartment in an MT mounting support.
L = 181.5 mm.

Cover plate APMT5/1

St Steel
Strip galvanised/organically coated




Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 1	Grey-white	181.5	20	12.700	7406908

/pc.

Cover plate for the installation of 4 data connection sockets of design LJU6C.
L = 181.5 mm.

Cover plate APMT5 with two single sockets

St Steel
Strip galvanised/organically coated




Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 BS 2xSS0	Grey-white	181.5	4	25.300	7407878

/pc.

Cover plate with two switched single sockets for installation in mounting supports beneath GES service outlets and cassettes. Sockets with increased contact protection with screw connection, 3-pole, 13 A, 250 V~, corresponds to BS 1363.

Cover plate APMT5 with double socket


St Steel
Strip galvanised/organically coated



Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 BS 2SS0	Grey-white	181.5	4	23.200	7407870

/pc.

Cover plate with a switched double socket for installation in mounting supports beneath GES service outlets and cassettes. Socket with increased contact protection with screw connection, 3-pole, 13 A, 250 V~, corresponds to BS 1363.

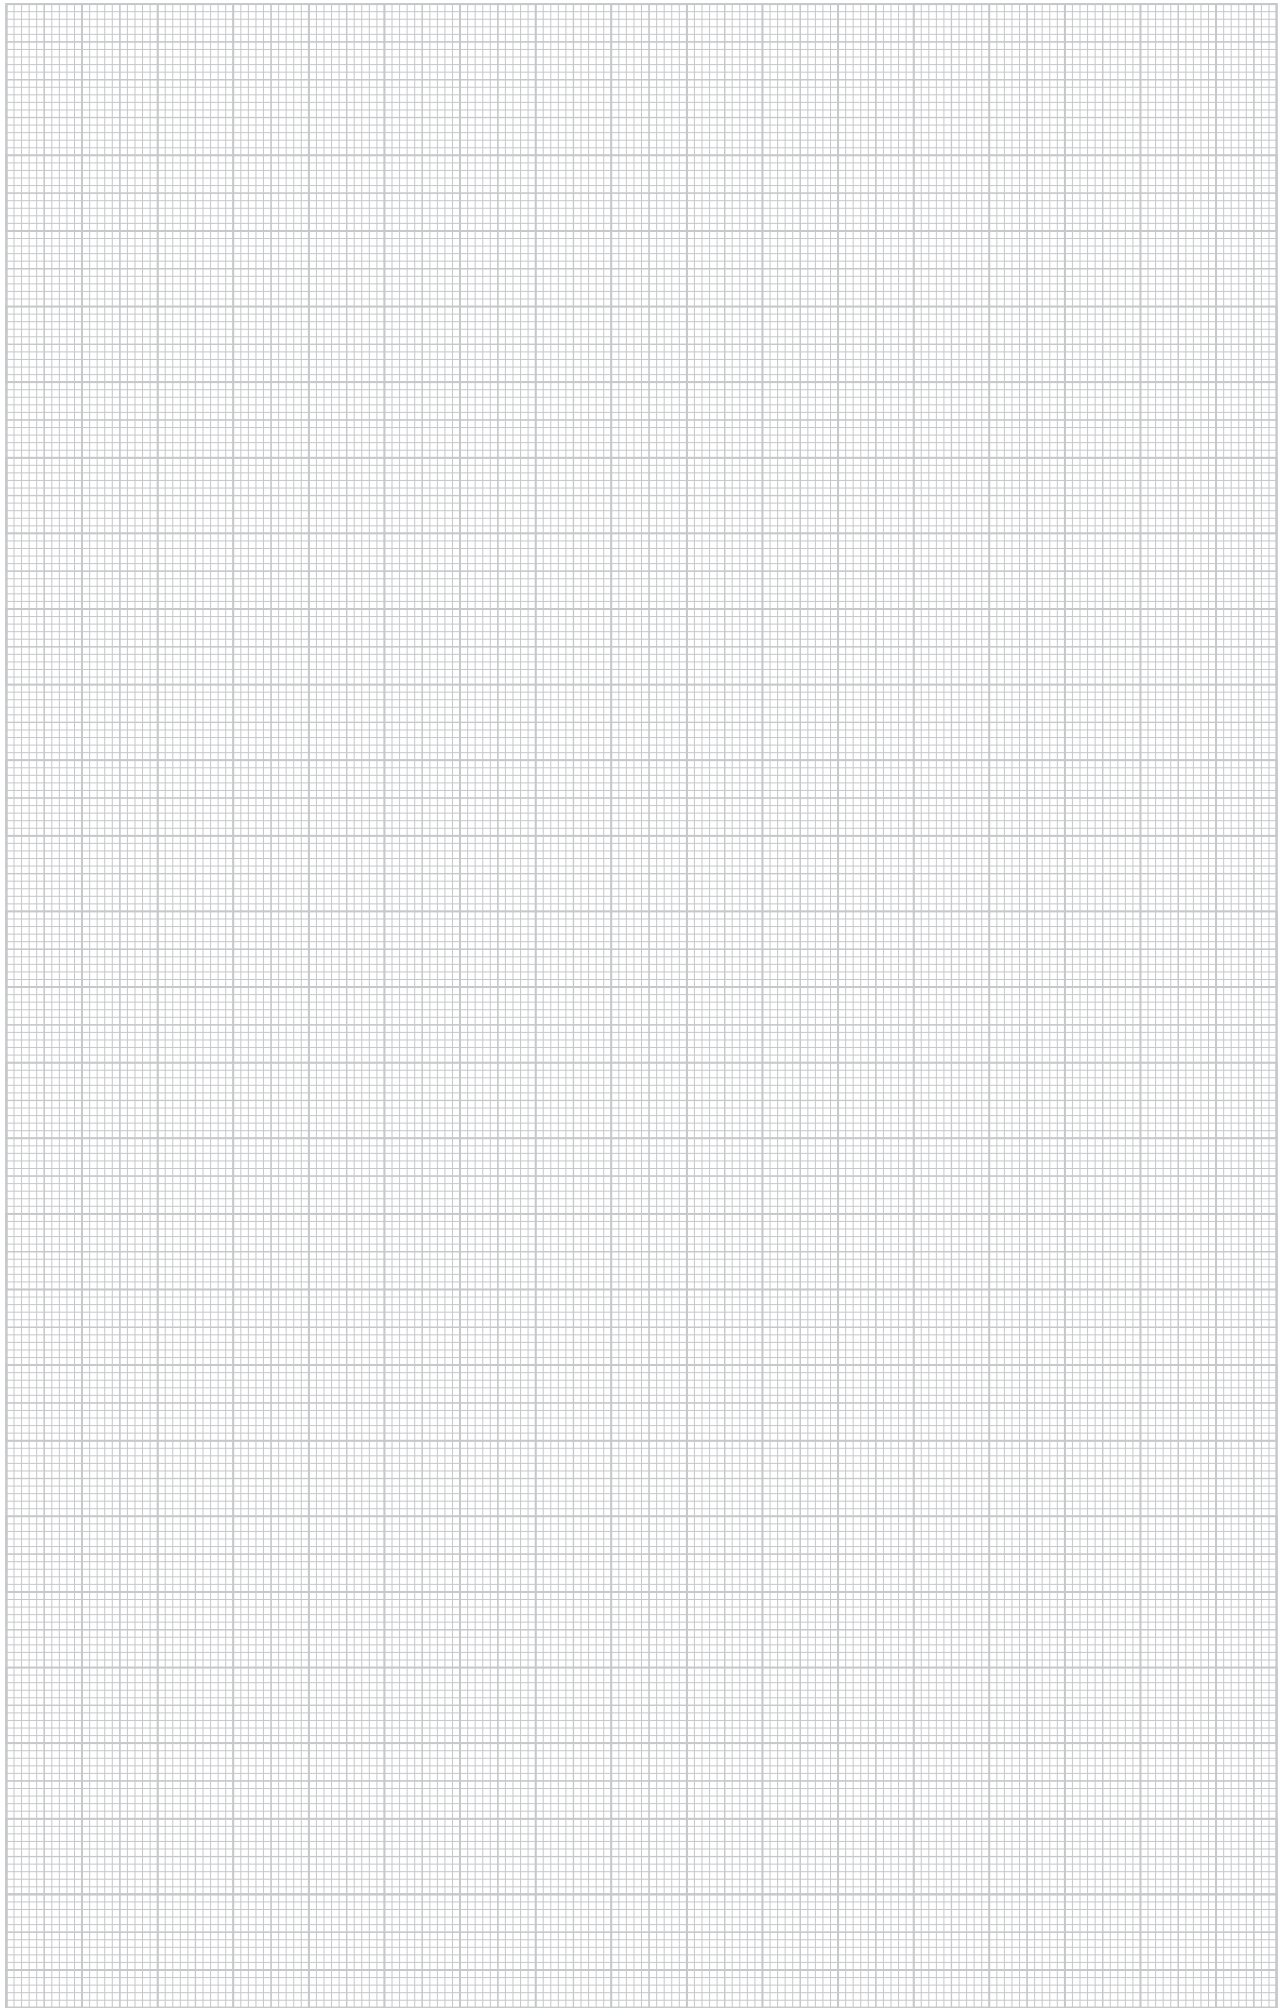


Heavy-duty systems



St Steel
FS Strip galvanised

UZD350-3 for screed height 70–125 mm

Type	Dim. A mm	Dim. B mm	Dimen- sion a mm	Dim. b mm	Screed height mm	Pack Piece	Weight kg/100 pc.	Item no.
UZD 350-3	467	510	362	383	70 - 125	1	590.000	7410034




Underfloor junction and branch box for screed-covered underfloor installation ducts with sheet steel side walls. To mount installation units in the mounting lid (to be ordered separately). Height can be infinitely adjusted to the nominal screed height (rapid adjustment possible) and the screed can be worked flushed to the screed scraping edge. With noise decoupling option after screed laying and can be used with system accessories, also for heavy-duty application.

Side walls prepared for duct widths of 190, 250 and 350 mm.

St Steel
FS Strip galvanised

DSSL heavy-duty support

Type	Screed height mm	Pack PU	Weight kg/100 PUs	Item no.
DSSL2 105	105 - 140	1	111.040	7410583
DSSL2 135	135 - 170	1	121.840	7410585





The heavy-duty supports reinforce the corner areas of the type UZD-3 underfloor box for increased load requirements.

St Steel
FS Strip galvanised

Heavy-duty mounting lid for 350-3, nominal size 9

Type	Dim. A mm	Dimen- sion a mm	Pack Piece	Weight kg/100 pc.	Item no.
DUG 350-3 9SL	383	244	1	294.400	7401410




The heavy-duty mounting lid for the type UZD350-3 underfloor box is suitable for installation in a square heavy-duty cassette of nominal size 9. The installation opening is recessed by 3 mm and can be closed subsequently by a lid blanking plate.

St Steel
G Electrogalvanised

Height adjustment unit for heavy-duty mounting lid

Type	Screed height mm	Pack PU	Weight kg/100 PUs	Item no.
DUG SL105	105 - 140	1	36.184	7409682
DUG SL135	135 - 170	1	44.632	7409684





The height adjustment units rated for increased load requirements permit the screed-flush height adjustment of the heavy-duty mounting lid and are to be ordered separately.

The VPE consists of four height adjustment units.

Height-adjustable heavy-duty cassette, blank, RKNSL, nominal size 9, stainless steel

VA Stainless steel, rustproof 1.4301



Type	Dim. h mm	Floor covering thickness mm	Floor height mm	Material	Pack Piece	Weight kg/100 pc.	Item no.
RKN2 9 VMSL1N 16	100	16	100-150	A2	1	550.000	7409028
RKN2 9 VMSL1N 21	105	21	105-155	A2	1	563.000	7409030



/pc.

Heavy-duty "blank" square cassette of nominal size 9 for the creation of an inspection opening in trunking systems, raised or cavity floors, in dry or wet-cleaned floors for indoor use. Load class 1 to 10 kN. Only suitable for smooth floor coverings.

Height-adjustable heavy-duty cassette as a blind cassette with a load bearing capacity of 1–10 kN, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.

Height-adjustable heavy-duty cassette for tube body RKFNSL, nominal size 9, stainless steel

VA Stainless steel, rustproof 1.4301



Type	Dim. h mm	Floor covering thickness mm	Floor height mm	Material	Pack Piece	Weight kg/100 pc.	Item no.
RKFN2 9 VMSL1N16	100	16	100-150	A2	1	501.000	7409388
RKFN2 9 VMSL1N21	105	21	105-155	A2	1	514.000	7409390

/pc.

Heavy-duty square cassette for tube body of nominal size 9 for the installation of accessories in trunking systems, raised or cavity floors, in dry or wet-cleaned floors for indoor use. Load class 1 to 10 kN.

Height-adjustable heavy-duty cassette with tube body with a load bearing capacity of 1–10 kN, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.


St Steel
FS Strip galvanised

Heavy-duty mounting lid for 350-3, nominal size R9

Type	Dim. A mm	Dimension d Ø mm	Pack Piece	Weight kg/100 pc.	Item no.
DUG 350-3 R9SL	383	305	1	252.500	7401416

/pc.

The heavy-duty mounting lid for the UZD350-3 underfloor box is suitable for the installation of a round heavy-duty cassette of nominal size R9. The installation opening is recessed by 3 mm and can be closed subsequently by a lid blanking plate.



St Steel
G Electrogalvanised

Height adjustment unit for heavy-duty mounting lid

Type	Screed height mm	Pack PU	Weight kg/100 PUs	Item no.
DUG SL105	105-140	1	36.184	7409682
DUG SL135	135-170	1	44.632	7409684

price/pack

The height adjustment units rated for increased load requirements permit the screed-flush height adjustment of the heavy-duty mounting lid and are to be ordered separately.

The VPE consists of four height adjustment units.



VA Stainless steel, rustproof 1.4301


Height-adjustable heavy-duty cassette for tube body RKFRSL, nominal size R9, stainless steel

Type	Dim. h mm	Floor covering thickness mm	Floor height mm	Material	Pack Piece	Weight kg/100 pc.	Item no.
RKFR2 9 SL2V2 20	110	20	105-155	A2	1	589.000	7409470
RKFR2 9 SL2V2 25	114	25	109-159	A2	1	647.000	7409472

/pc.

Round heavy-duty cassette for tube body of nominal size R9 for the installation of accessories in trunking systems, raised and cavity floors, in dry or wet-cleaned floors. Load class 2 to 20 kN.

Height-adjustable heavy-duty cassette with tube body with a load bearing capacity of 2–20 kN, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.



VA Stainless steel, rustproof 1.4301


Height-adjustable heavy-duty cassette, blank, RKRSLS, nominal size R9, stainless steel

Type	Dim. h mm	Floor covering thickness mm	Floor height mm	Material	Pack Piece	Weight kg/100 pc.	Item no.
RKR2 9SL2 V2 20	105	20	105-155	A2	1	664.000	7409112
RKR2 9SL2 V2 25	109	25	109-159	A2	1	620.000	7409114

/pc.


Round, "blank", heavy-duty cassette of nominal size R9 for the creation of an inspection opening in trunking systems, raised and cavity floors, in dry or wet-cleaned floors for indoor use. Load class 2 to 20 kN. Only suitable for smooth floor coverings.

Height-adjustable heavy-duty cassette as a blind cassette with a load bearing capacity of 2–20 kN, 3-compartment. 3 APMT5 cover plates can be installed. For the installation of 3 UT4 universal supports for 9 individual installation devices with support ring/support clamp or 12 Modul 45 devices.



Tube body with cover plate, without handle clamp, for frame cassette and height-adjustable cassette

Zn Die-cast zinc
N Nickel-plated




Type	Pack Piece	Weight kg/100 pc.	Item no.
TUK2 V	1	59.000	7428141

/pc.

Height-adjustable cord outlet for installation in RKF frame cassettes and in height-adjustable round and square RKFR and RKFN cassettes. Raised height when used, flushfloor when unused. Use in wet-care floors. Tube body cover made of V2A.

Tube body with cover plate, with handle clamp, for frame cassette and height-adjustable cassette

Zn Die-cast zinc
N Nickel-plated





Type	Pack Piece	Weight kg/100 pc.	Item no.
TUK2 GV	1	59.000	7428140

/pc.

Height-adjustable cord outlet for installation in RKF frame cassettes and in height-adjustable round and square RKFR and RKFN cassettes. Raised height when used, flushfloor when unused. Use in wet-care floors. Tube body cover and handle made of V2A.

Round seal for tube body

EPDM Ethylene propylene dien rubber DIN 1629





Type	Pack Piece	Weight kg/100 pc.	Item no.
RD2 TUK2	1	0.200	7407098

/pc.

Round seal for tube body TUK2 - spare part.

Flat seal for square height-adjustable cassette, nominal size (spare part)

EPDM Ethylene propylene dien rubber DIN 1629





Type	Pack Piece	Weight kg/100 pc.	Item no.
FD 9 QNK2	1	1.700	7407109

/pc.

Flat seal for height-adjustable square cassettes RKN2 and RKFN2 of nominal sizes 4 and 9.

Round seal for height-adjustable round cassette (spare part)

EPDM Ethylene propylene dien rubber DIN 1629



Type	Pack Piece	Weight kg/100 pc.	Item no.
RD R9 NK2	1	1.500	7407075

/pc.

Round seal for height-adjustable round cassettes RKR2 and RKFR2 of nominal sizes R4, R7 and R9.

Mounting paste based on synthetic oil

Care agent for cassette seal and tube body seal

Type	Pack Piece	Weight kg/100 pc.	Item no.
PF-G	1	0.800	7407110


/pc.

Cleaning agent for round seals RD2, flat seals FD2 QNK and tube body seal RD2TUK2.



Mounting support, nominal size 9 and R9, for APMT5 cover plates

St Steel
FS Strip galvanised




Type	Pack Piece	Weight kg/100 pc.	Item no.
MT 9R9 AP 5	1	25.650	7407756

/pc.

Mounting support for accepting three APMT5 cover plates, which aid the installation of accessories in installation units of nominal size 9.

Cover plate APMT5/0

St Steel
Strip galvanised/organically coated




Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 0	Grey-white	181.5	20	12.700	7406904

/pc.

For blanking locking on an unused compartment in an MT mounting support.
L = 181.5 mm.

Cover plate APMT5/1

St Steel
Strip galvanised/organically coated




Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 1	Grey-white	181.5	20	12.700	7406908

/pc.

Cover plate for the installation of 4 data connection sockets of design LJU6C.
L = 181.5 mm.

Cover plate APMT5 with two single sockets

St Steel
Strip galvanised/organically coated




Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 BS 2xSS0	Grey-white	181.5	4	25.300	7407878

/pc.

Cover plate with two switched single sockets for installation in mounting supports beneath GES service outlets and cassettes. Sockets with increased contact protection with screw connection, 3-pole, 13 A, 250 V~, corresponds to BS 1363.

Cover plate APMT5 with double socket


St Steel
Strip galvanised/organically coated



Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 BS 2SS0	Grey-white	181.5	4	23.200	7407870

/pc.

Cover plate with a switched double socket for installation in mounting supports beneath GES service outlets and cassettes. Socket with increased contact protection with screw connection, 3-pole, 13 A, 250 V~, corresponds to BS 1363.

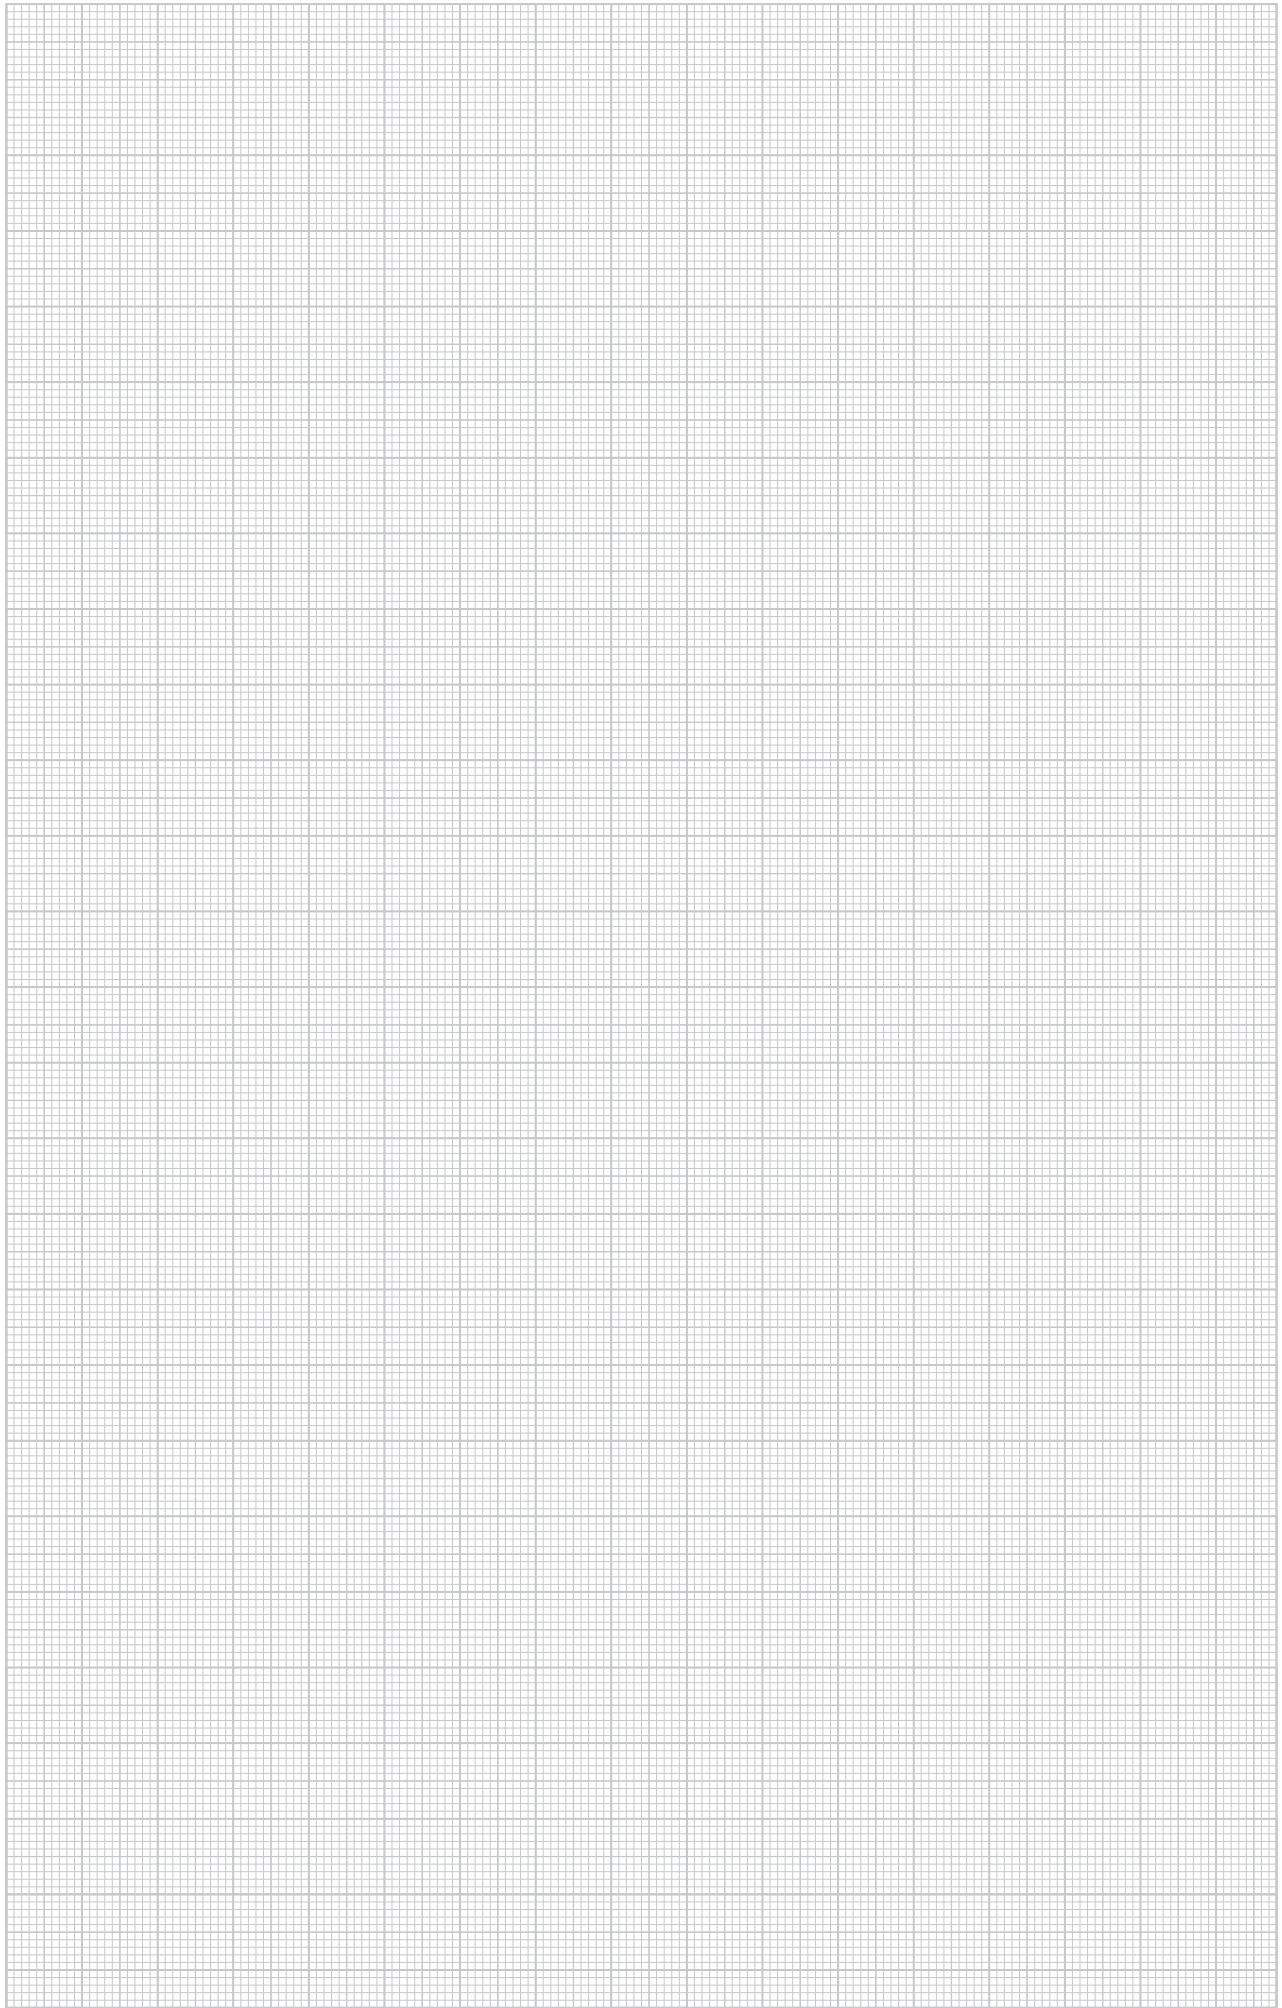

UDHOME floor sockets and floor boxes




VA Stainless steel, rustproof 1.4301
Brushed and laminated

UDHOME2 floor socket, with floor covering recess in stainless steel cover, equipped

Type	Dim. h mm	Pack Piece	Weight kg/100 pc.	Item no.
UDHOME2 V BS	85	1	210.000	7368392

/pc.

Square installation unit for use in dry-care cavity and screed floors. With recess in the hinged cover for the floor covering. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. The minimum installation depth is 85 mm, the height adjustment range + 20 mm.
The scope of delivery contains one BS socket with switch and a mounting support for up to two LJ6C data modules.
Surfaces visible in the floor covering made of brushed stainless steel.




VA Stainless steel, rustproof 1.4301
Brushed and laminated

UDHOME2 floor socket, with stainless steel cover, equipped

Type	Dim. h mm	Pack Piece	Weight kg/100 pc.	Item no.
UDHOME2 BV BS	75	1	185.000	7368393


/pc.

Square installation unit for use in dry-care cavity and screed floors for indoor use. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. The minimum installation depth is 75 mm, the height adjustment range + 20 mm.
The scope of delivery contains one BS socket with switch and a mounting support for up to two LJ6C data modules.
Surfaces visible in the floor covering made of brushed stainless steel.



UDHOME4 floor box, freely equippable, stainless steel

VA Stainless steel, rustproof 1.4301



Type	Dim. h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
UDHOME4 2V	95	95-125	15	1	384.000	7427232



/pc.

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of stainless steel.

UDHOME4 floor box, freely equippable, brass

CuZn 37 Brass



Type	Dim. h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
UDHOME4 2M	95	95-125	15	1	344.800	7427236


/pc.

Square floor box for use in dry-cleaned cavity and screed floors for indoor use. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of brass.

Height extension for UDHOME4 floor box

St Steel
FS Strip galvanised




Type	Height adjustment range mm	Pack Piece	Weight kg/100 pc.	Item no.
HE60 UDHOME4	10-60	1	109.800	7427440

/pc.

Height-adjustable expansion for UDHOME4 floor box.

Mounting support, nominal size 4 and R4, for APMT2 cover plates

St Steel
FS Strip galvanised




Type	Pack Piece	Weight kg/100 pc.	Item no.
MT 4R4 AP 2	1	12.310	7407748

/pc.

Mounting support for accepting APMT2 cover plates, which aid the installation of accessories in installation units of nominal sizes 4 and R4.

Cover plate APMT2/0

St Steel
Strip galvanised/organically coated



Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT2 0	Grey-white	163	20	12.300	7406912

/pc.

For blanking locking on an unused compartment in an MT mounting support.
L = 163 mm.

St Steel


Strip galvanised/organically coated

Cover plate APMT2/1

Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT2 1	Grey-white	163	20	11.100	7406916

/pc.

Cover plate for the installation of 4 data connection sockets of design LJU6C.
L = 163 mm.



St Steel


Strip galvanised/organically coated

Cover plate APMT2 with double socket

Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT2 BS 2SS0	Grey-white	163	4	21.500	7407872


/pc.

Cover plate with a switched double socket for installation in mounting supports beneath GES service outlets and cassettes.
Socket with increased contact protection with screw connection, 3-pole, 13 A, 250 V~, corresponds to BS 1363.



UDHOME9 floor box, freely equippable, stainless steel

VA Stainless steel, rustproof 1.4301





Type	Dim. h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
UDHOME9 2V	95	95-125	15	1	470.000	7427324

/pc.

Square floor box for use in dry-cleaned cavity and screed floors for indoor use. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm. Surfaces visible in the floor covering made of stainless steel.

UDHOME9 floor box, freely equippable, brass

CuZn 37 Brass




Type	Dim. h mm	Floor height mm	Floor covering thickness mm	Pack Piece	Weight kg/100 pc.	Item no.
UDHOME9 2M	95	95-125	15	1	482.000	7427328

/pc.

Square floor box for use in dry-cleaned cavity and screed floors for indoor use. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm. Surfaces visible in the floor covering made of brass.

Height extension for UDHOME9 floor box

St Steel
FS Strip galvanised




Type	Height adjustment range mm	Pack Piece	Weight kg/100 pc.	Item no.
HE60 UDHOME9	10-60	1	145.700	7427444

/pc.

Height-adjustable expansion for UDHOME9 floor box.

Mounting support, nominal size 9 and R9, for APMT5 cover plates

St Steel
FS Strip galvanised




Type	Pack Piece	Weight kg/100 pc.	Item no.
MT 9R9 AP 5	1	25.650	7407756

/pc.

Mounting support for accepting three APMT5 cover plates, which aid the installation of accessories in installation units of nominal size 9.

Cover plate APMT5/0

St Steel
Strip galvanised/organically coated



Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 0	Grey-white	181.5	20	12.700	7406904

/pc.

For blanking locking on an unused compartment in an MT mounting support.
L = 181.5 mm.

St Steel


Strip galvanised/organically coated

Cover plate APMT5/1

Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 1	Grey-white	181.5	20	12.700	7406908

/pc.

Cover plate for the installation of 4 data connection sockets of design LJU6C.
L = 181.5 mm.



St Steel


Strip galvanised/organically coated

Cover plate APMT5 with double socket

Type	Colour	Length mm	Pack Piece	Weight kg/100 pc.	Item no.
AP MT5 BS 2SS0	Grey-white	181.5	4	23.200	7407870

/pc.

Cover plate with a switched double socket for installation in mounting supports beneath GES service outlets and cassettes. Socket with increased contact protection with screw connection, 3-pole, 13 A, 250 V~, corresponds to BS 1363.



GES R2 floor sockets



UFS Portfolio UK / en / 2021/03/24 07:59:00 07:59:18 (LLExport_02826) / 2021/03/24 07:59:18 07:59:18



Hinged cover with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket. When closed, the floor socket fulfils the requirement of EN 50085-2-2 for wet-cleaned floors.

Metal hinged cover for GES R2 floor socket


Zn	Die-cast zinc
N	Nickel-plated

Service outlet with hinged cover and locking slider, GES R2, nickel

Type	Pack Piece	Weight kg/100 pc.	Item no.
GES R2 Ni	1	58.500	7408850

/pc.

Hinged cover with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket for indoor use.
When closed, the floor socket can be wet-cleaned.




Zn	Die-cast zinc
CuZn 37	Brass-coated

Service outlet with hinged cover and locking slider, GES R2, old brass

Type	Pack Piece	Weight kg/100 pc.	Item no.
GES R2 CuZn	1	58.500	7408852

/pc.

Hinged cover with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket for indoor use.
When closed, the floor socket can be wet-cleaned.




Zn	Die-cast zinc
Cu	Copper-plated

Service outlet with hinged cover and locking slider, GES R2, old copper

Type	Pack Piece	Weight kg/100 pc.	Item no.
GES R2 Cu	1	58.500	7408854

/pc.

Hinged cover with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket for indoor use.
When closed, the floor socket can be wet-cleaned.




Zn	Die-cast zinc
	Chrome-plated

Service outlet with hinged cover and locking slider, GES R2, chrome

Type	Pack Piece	Weight kg/100 pc.	Item no.
GES R2 Cr	1	58.500	7408856

/pc.

Hinged cover with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket for indoor use.
When closed, the floor socket can be wet-cleaned.






Tube body with handle clamp for GES R2 floor socket for direct installation in the MT R2 installation socket. The tube body fulfils the requirements of EN 50085-2-2 for wet-cleaned floors, also when opened.

Tube body for floor socket GES R2

Service outlet with tube body with handle clamp, GES R2, nickel

Zn Die-cast zinc
N Nickel-plated




Type	Pack Piece	Weight kg/100 pc.	Item no.
GES R2T Ni	1	114.100	7408860

/pc.

Tube body with handle clamp for GES R2 floor socket for direct installation in the MT R2 installation socket for indoor use.
The tube body fulfils the requirements of EN 50085-2-2 for wet-cleaned floors, also when opened.

Service outlet with tube body with handle clamp, GES R2, old brass

Zn Die-cast zinc
CuZn 37 Brass-coated




Type	Pack Piece	Weight kg/100 pc.	Item no.
GES R2T CuZn	1	114.100	7408862

/pc.

Tube body with handle clamp for GES R2 floor socket for direct installation in the MT R2 installation socket for indoor use.
The tube body fulfils the requirements of EN 50085-2-2 for wet-cleaned floors, also when opened.

Service outlet with tube body with handle clamp, GES R2, old copper

Zn Die-cast zinc
Cu Copper-plated




Type	Pack Piece	Weight kg/100 pc.	Item no.
GES R2T Cu	1	114.100	7408864

/pc.

Tube body with handle clamp for GES R2 floor socket for direct installation in the MT R2 installation socket for indoor use.
The tube body fulfils the requirements of EN 50085-2-2 for wet-cleaned floors, also when opened.

Service outlet with tube body with handle clamp, GES R2, chrome

Zn Die-cast zinc
Chrome-plated



Type	Pack Piece	Weight kg/100 pc.	Item no.
GES R2T Cr	1	114.100	7408866

/pc.

Tube body with handle clamp for GES R2 floor socket for direct installation in the MT R2 installation socket for indoor use.
The tube body fulfils the requirements of EN 50085-2-2 for wet-cleaned floors, also when opened.



Hinged cover with cord outlet for GES R2 floor socket for direct installation in the MT R2 installation socket. For use in dry-cleaned floors.

Plastic cover for floor socket GES R2

PA



Polyamide

Hinged cover with cord outlet

Type	Colour	Pack Piece	Weight kg/100 pc.	Item no.
GES R2 9011	Graphite black	1	8.800	7405084

/pc.

Hinged cover with cord outlet for GES R2 floor socket for direct installation in the MT R2 installation socket.
For use in dry-cleaned floors for indoor use.



PA



Polyamide

Hinged cover with cord outlet

Type	Colour	Pack Piece	Weight kg/100 pc.	Item no.
GES R2 7011	Iron grey	1	8.800	7405082


/pc.

Hinged cover with cord outlet for GES R2 floor socket for direct installation in the MT R2 installation socket.
For use in dry-cleaned floors for indoor use.



Screed box for GES R2

St Steel
FS Strip galvanised




Type	Screed height		Installation diameter	Pack Piece	Weight kg/100 pc.	Item no.
	mm					
UD GES R2	85-130	122		1	218.000	7428526

/pc.

Height-adjustable screed box for the installation of the installation socket of the GES R2 floor socket.
With 2x2 insertion openings for installation pipes (M20/M25).

Installation socket, 1.5 empty

PA Polyamide



Type	Installation depth		Pack Piece	Weight kg/100 pc.	Item no.
	mm				
MT R2 1.5	85		1	19.500	7408836


/pc.

Installation socket for GES R2 floor socket for mounting in UD GES R2 screed socket and in raised floor plates with an installation opening diameter of 122 mm.

Included in the delivery is a cover plate for the installation of 1.5x Modul 45 sockets (BS, SA). Up to two modular data sockets (Keystones) can be installed with optional mounting plate.

0° socket with switch, British Standard, single

PC Polycarbonate



Type	Colour		Pack Piece	Weight kg/100 pc.	Item no.
STD-BS0G RW1.5	Pure white		1	6.000	6120724


/pc.

Socket, single 0°, with switch, British Standard, conforms to BS 1363, with increased touch protection, with screw terminals, 2-pin, 13 A, 250 V~.

Mounting plates

Mounting plate for data technology, type LJUC


VA Stainless steel, rustproof 1.4301



Type	Pack Piece	Weight kg/100 pc.	Item no.
MP 2R LJUC	1	1.700	7408812

/pc.

Mounting plate for receiving a data connection module type LJU6C.
Dimensions of a mounting opening in mm: 36.2 x 22.0.

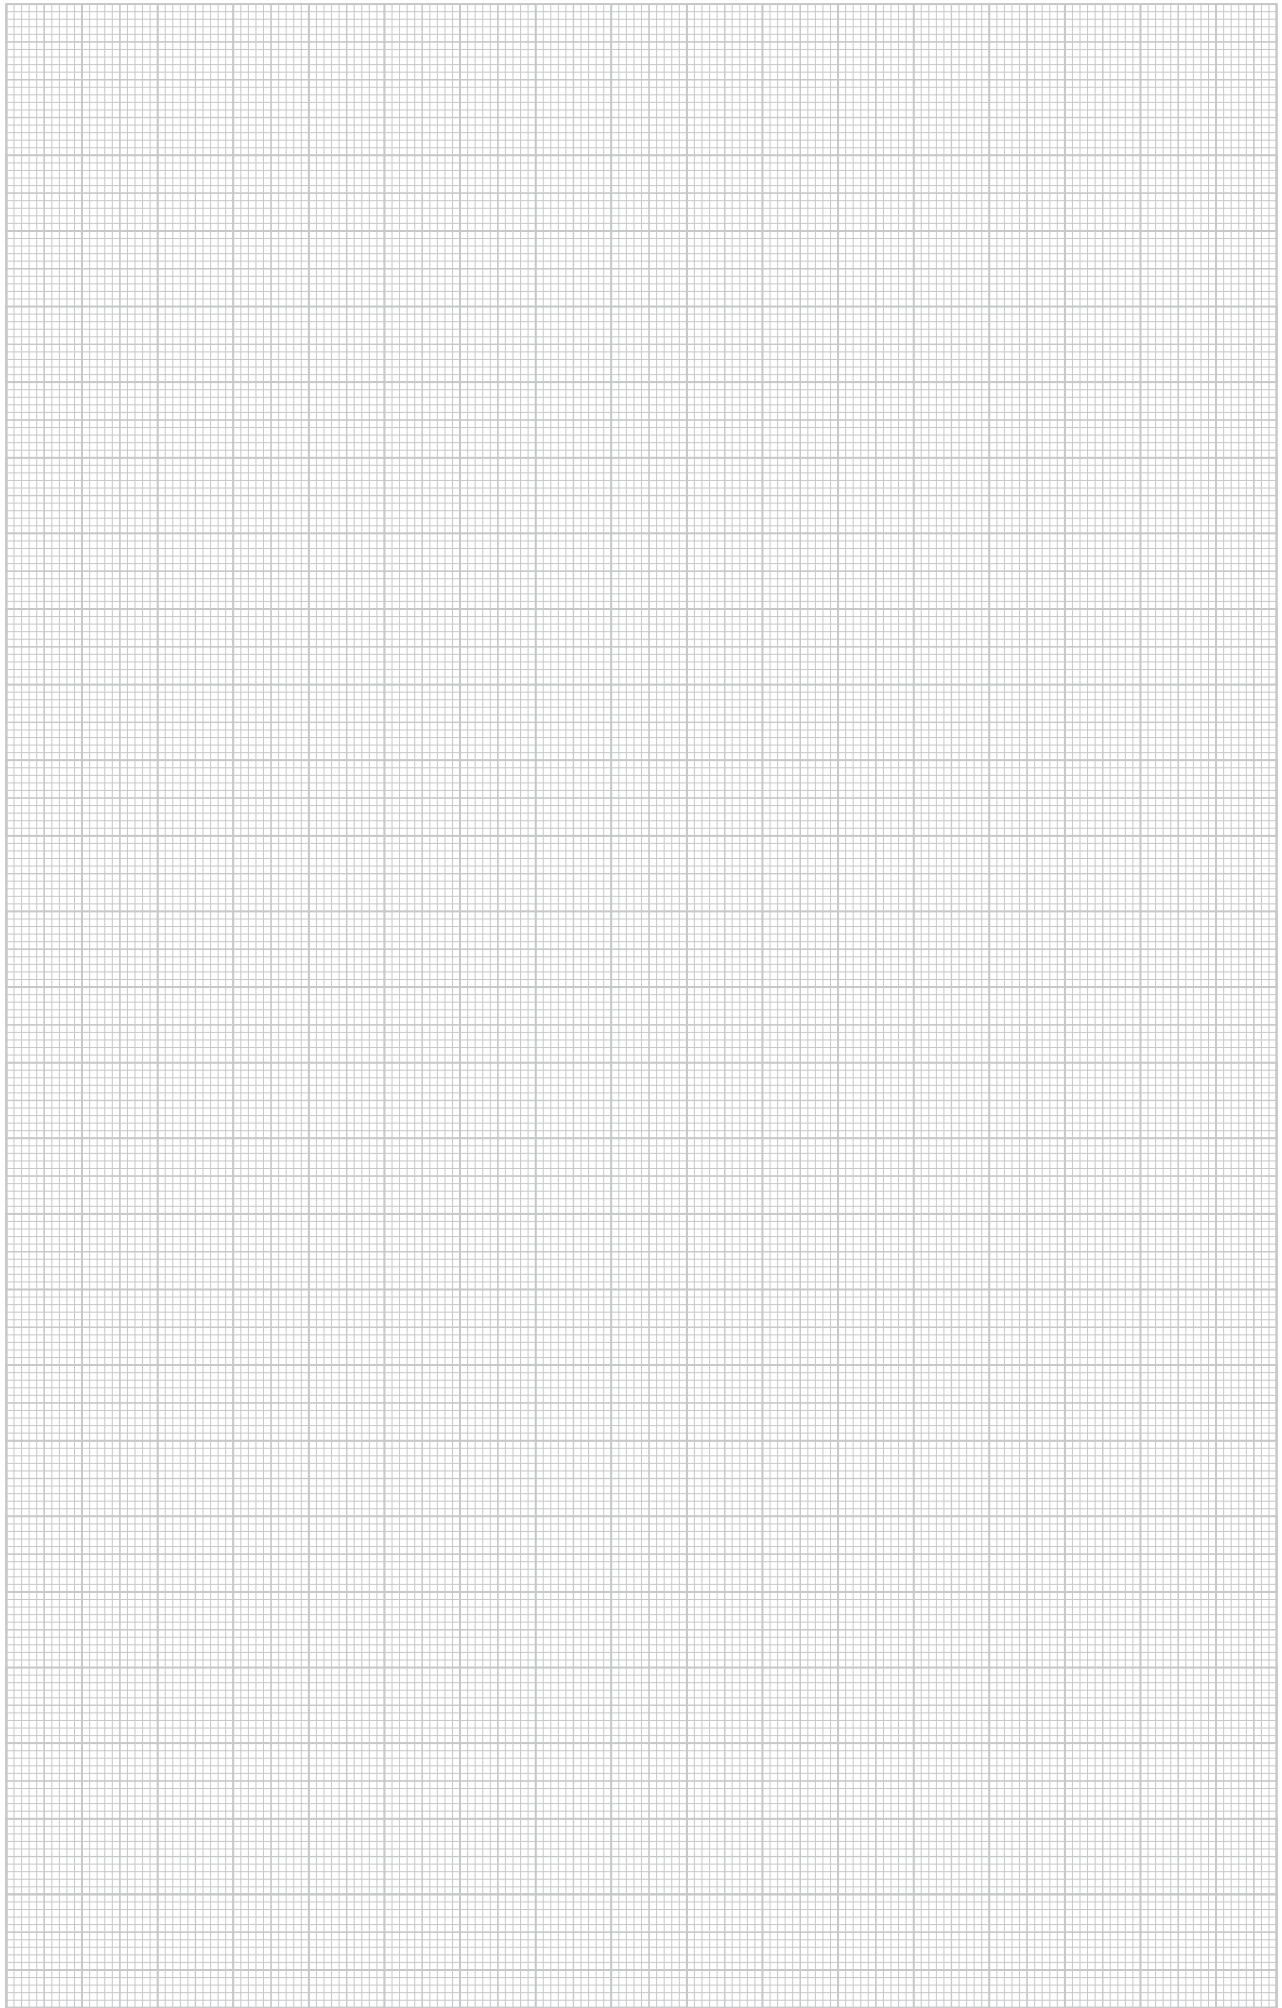

TRENCH Ltd.

C M T Trading Estate
Broadwell Road
Oldbury, West Midlands
B69 4BQ
United Kingdom

Customer Service

Phone: 0121 544 7011
Fax: 0121 544 7721
E-Mail: sales@trenchltd.com

www.trenchltd.com

Building Connections

TRENCH

OBO Bettermann Group