

Selection Guide for Underscreed Trunking and Service Outlet Boxes size 250-3

Duct 250 mm width, 28 mm height

	Type	Item no.
Duct, 3-compartment*	S3 25028	7400 32 4
Connection shackle	VL 25028E	7400 96 6
Vertical bend, 3-compartment*	KV3 25028	7400 64 4
End cap	SES 25027	7404 00 2

Duct 250 mm width, 38 mm height

	Type	Item no.
Duct, 3-compartment*	S3 25038	7400 32 8
Connection shackle	VL 25038E	7400 96 8
Vertical bend, 3-compartment*	KV3 25038	7400 64 8
End cap	SES 25037	7404 00 6



UZD250-3 underfloor box

Screed height in mm	Type	Item no.
70–125	UZD 250-3	7410 03 0

Duct connection bracket for Earth Grounding

Type	Item no.
VW E	7400 98 0

Quick release aid

Type	Item no.
SE UZD3	7410 16 0

Nominal size 6



Blanking lid

DUG 250-3 6	7400 46 3
--------------------	-----------

Dry and moist-cleaned



Service outlet

Iron grey	GES6 U 7011	7405 30 8
Graphite black	GES6 U 9011	7405 31 2
Point loading with small surface of Ø 13mm:		2kN
Point loading with big surface of Ø 130mm:		3kN

Nominal size 9



Blanking lid

DUG 250-3 9	7400 46 7
--------------------	-----------

Service outlet and inspection lid

Iron grey	GES9-3B U 7011	7405 07 7
Graphite black	GES9-3B U 9011	7405 07 9
Iron grey	ZES9-2 U10T 7011	7406 67 2
Point loading with small surface of Ø 13mm:		3kN
Point loading with big surface of Ø 130mm:		5kN

Height-adjustable cassette

RKSN2 9 VS20	7409 21 8
---------------------	-----------

Decoupable cassette

RKSN2 UZD3 9 VS20	7409 23 8
--------------------------	-----------

Levelling profile

NW 250-3 QK	7410 54 0
--------------------	-----------

Point loading with small surface of Ø 13mm: 3kN
Point loading with big surface of Ø 130mm: 5kN

Variable floor covering recess in the service outlet:
Rectangular: 5 or 10 mm

Stainless steel cassettes with 20 mm floor covering recess
Height adjustment range 105–150 mm [rectangular]

Wet-cleaned



IP 20 when in use



IP 44 when not in use



Cassette for tube body

RKFN2 9 VS20	7409 36 8
---------------------	-----------

Decoupable cassette

RKFN2 UZD3 9 VS20	7409 37 8
--------------------------	-----------

Levelling profile

NW 250-3 QK	7410 54 0
--------------------	-----------

Point loading with small surface of Ø 13mm: 3kN
Point loading with big surface of Ø 130mm: 5kN

Stainless steel cassettes with 20 mm floor covering recess
Height adjustment range 105–150 mm [rectangular]
Please order the tube body separately.

* Underfloor Trunking supplied in 2 metre lengths.

Device installation and accessories

Device installation, normal size 6


				
Type	MT 6 AP2	AP MT2 0	AP MT2 1	AP MT2 BS 2SS0
Version	for 3 cover plates AP MT2	blank	for LJC6C	Switched double socket
Item no.	7407 75 2	7406 91 2	7406 91 6	7407 87 2

Device installation, normal size 9 and R9


					
Type	MT 9R9 AP 5	AP MT5 BS 2SS0	AP MT5 BS 2xSS0	AP MT5 0	AP MT5 1
Version	for 3 cover plates AP MT5	Switched double socket	2 x switched single sockets	blank	for LJC6C
Item no.	7407 75 6	7407 87 0	7407 87 8	7406 90 4	7406 90 8

Accessories

				
Type	TUK2 V	TUK2 GV	8AWR	UZD CC2 250250
Version	Cover made of V2A	Cover made of V2A	required for UZD	For UZD-3 to be used as a 90°/T/4WAY
Item no.	7428 14 1	7428 14 0	6288 70 4	7428 13 4

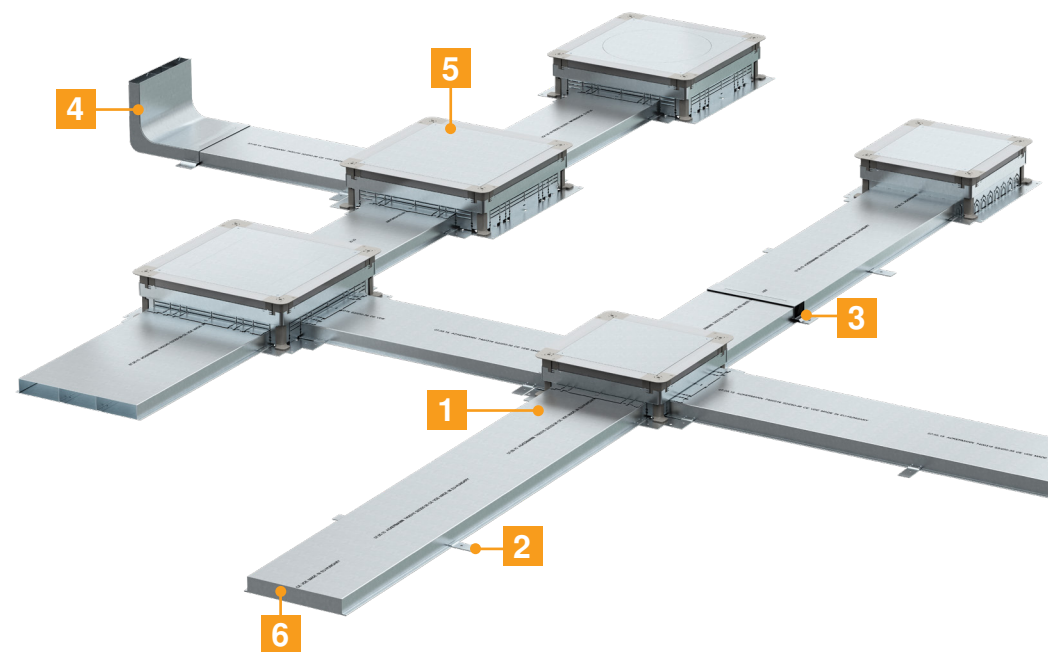

- 1 Underfloor installation duct
- 2 Duct connection bracket
- 3 Connection shackle
- 4 Vertical bend
- 5 Underfloor junction and branch box (UZD)
- 6 End cap

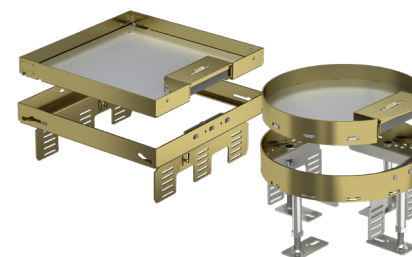

Cassettes also available in brass.
For more information contact your
Trench sales team.